

Contents

| | Page |
|---|--------------|
| Technical characteristics Han® K 3/0, Han® K 3/2 | 14.02 |
| Inserts Han® K 3/0, Han® K 3/2 | 14.03 |
| Hoods/Housings Han® 24 HPR for Han® K 3/0, Han® K 3/2 | 14.04 |
| Technical characteristics Han® HC Modular 250 | 14.06 |
| Contacts Han® HC Modular 250 | 14.07 |
| Hoods/Housings for Han® HC Modular 250 | 14.08 |
| Hoods/Housings for Han® HC Modular 250 enlarged | 14.09 |
| Technical characteristics Han® HC Modular 350 | 14.10 |
| Contacts Han® HC Modular 350 | 14.11 |
| Technical characteristics Han® HC Modular 350 Crimp | 14.12 |
| Contacts Han® HC Modular 350 Crimp | 14.13 |
| Hoods/Housings for Han® HC Modular 350 | 14.14 |
| Hoods/Housings for Han® HC Modular 350 enlarged | 14.17 |
| Technical characteristics Han® HC Modular 650 | 14.20 |
| Contacts Han® HC Modular 650 | 14.21 |
| Technical characteristics Han® HC Modular 650 Crimp | 14.22 |
| Contacts Han® HC Modular 650 Crimp | 14.23 |
| Hoods/Housings for Han® HC Modular 650 | 14.24 |
| Hoods/Housings for Han® HC Modular 650 enlarged | 14.25 |
| Technical characteristics Han® 24 HPR EasyCon | 14.28 |
| Hoods/Housings for Han® 24 HPR EasyCon | 14.29 |
| Technical characteristics Han® 48 HPR | 14.35 |
| Hoods/Housings Han® 48 HPR | 14.36 |


Features

- Only to be used with Han® 24 HPR special hoods and housings (see page 14.04)
- The ideal connector for transmission of high currents requiring little space
- The vertical and angled versions offer solutions for almost all applications
- The angled versions offer a space-saving 90° cable wiring

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques according to DIN EN 60 512-5-2

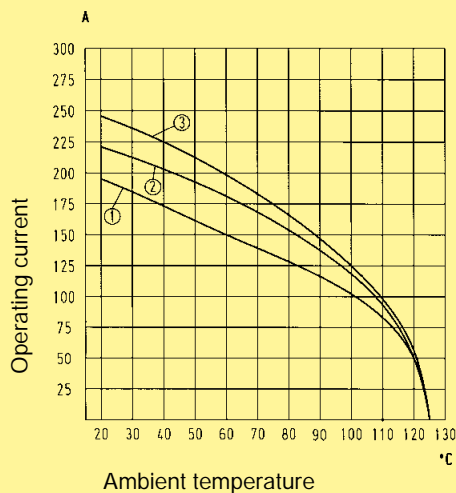

- ① Wire gauge 35 mm²
- ② Wire gauge 50 mm²
- ③ Wire gauge 70 mm²

Technical characteristics

| | |
|----------------|----------------------------------|
| Specifications | DIN EN 61 984 DIN EN 60 664-1 |
|----------------|----------------------------------|

Inserts

| | |
|-------------------------------------|---------------------------------|
| Number of contacts | 3, 3/2 + PE |
| Electrical data acc. to EN 61 984 | |
| Power area | 200 A 1150/2000 V 8 kV 3 |
| Rated current | 200 A |
| Rated voltage conductor - ground | 1150 V |
| Rated voltage conductor - conductor | 2000 V |
| Rated impulse voltage | 8 kV |
| Pollution degree | 3 |
| Pollution degree 2 also | 200 A 2000 V 12 kV 2 |
| Signal area | 16 A 400 V 6 kV 3 |
| Rated current | 16 A |
| Rated voltage | 400 V |
| Rated impulse voltage | 6 kV |
| Pollution degree | 3 |
| Pollution degree 2 also | 16 A 500 V 6 kV 2 |
| Insulation resistance | ≥ 10 ¹⁰ Ω |
| Material | polycarbonate |
| Limiting temperatures | -40 °C ... +125 °C |
| Flammability acc. to UL 94 | V 0 |
| Mechanical working life | ≥ 500 |
| - mating cycles | |

Contacts

| | | | | | | | | | |
|----------------------------------|---|-----------------|----|----|----|----|---|---|----|
| Material | copper alloy | | | | | | | | |
| Surface | silver | | | | | | | | |
| Contact resistance | ≤ 0.2 mΩ | | | | | | | | |
| Axial screw termination | | | | | | | | | |
| Power contacts | | | | | | | | | |
| - Wire gauge ¹⁾ | 35 ... 70 mm ² | | | | | | | | |
| - AWG | 2 ... 00 | | | | | | | | |
| - Hexagonal driver | SW 5, 09 99 000 0371, Page 99.13 | | | | | | | | |
| - Stripping length | 22 mm | | | | | | | | |
| | <table border="1"> <tr> <td>mm²</td> <td>35</td> <td>50</td> <td>70</td> </tr> <tr> <td>Nm</td> <td>8</td> <td>9</td> <td>10</td> </tr> </table> | mm ² | 35 | 50 | 70 | Nm | 8 | 9 | 10 |
| mm ² | 35 | 50 | 70 | | | | | | |
| Nm | 8 | 9 | 10 | | | | | | |
| - Tightening torque | | | | | | | | | |
| PE contact (only Han® K 3/2) | | | | | | | | | |
| - Wire gauge ¹⁾ | 16 ... 35 mm ² | | | | | | | | |
| - AWG | 5 ... 2 | | | | | | | | |
| - Hexagonal driver | SW 4, 09 99 000 0370, Page 99.13 | | | | | | | | |
| - Stripping length | 14 mm | | | | | | | | |
| - Tightening torque | 6 Nm | | | | | | | | |
| Signal contact (only Han® K 3/2) | | | | | | | | | |
| - Wire gauge ¹⁾ | 2.5 mm ² | | | | | | | | |
| - AWG | 14 | | | | | | | | |
| - Stripping length | 7 mm | | | | | | | | |
| - Tightening torque | 0.5 Nm | | | | | | | | |

Hoods/Housings

For technical details see chapter 31

¹⁾ geometric wire gauge

Number of contacts

3/0 without

3/2 with



| Identification | Series | Part number | | Drawing | Dimensions in mm |
|----------------------------------|--------|-----------------|-------------------|----------------|------------------|
| | | Male insert (M) | Female insert (F) | | |
| Axial screw terminal straight | Han® K | 3/0 | 09 38 005 2621 | 09 38 005 2721 | |
| | | | | | |
| Axial screw terminal straight | Han® K | 3/2 | 09 38 005 2601 | 09 38 005 2701 | |
| | | | | | |


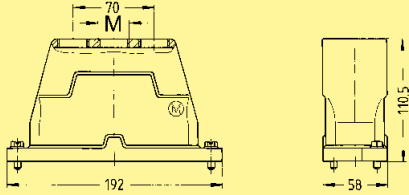



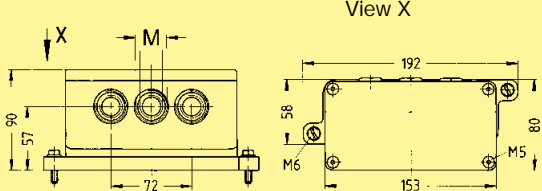


Han HC
Modular

Distance for contact max. 21 mm




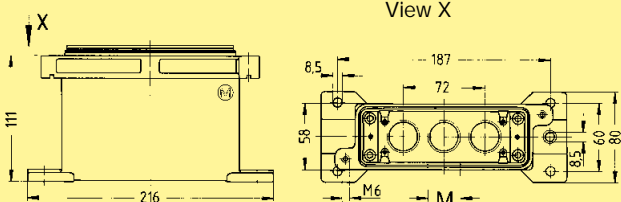

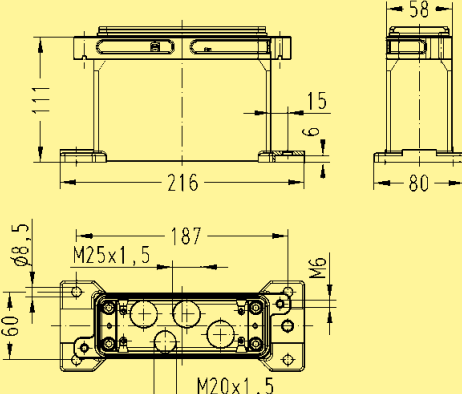

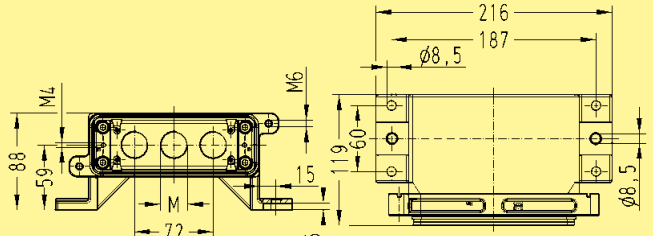

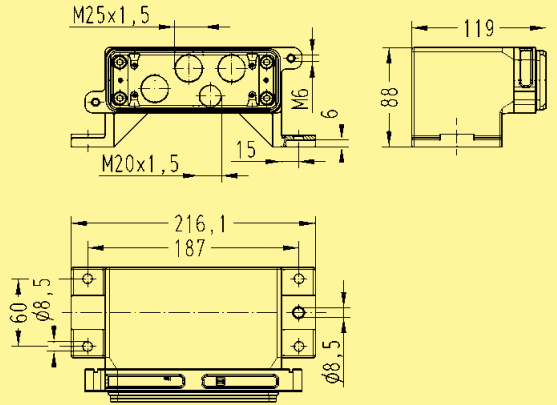

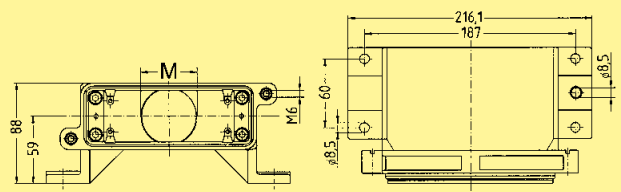
Distance for contact max. 21 mm

Stock items in bold type

Special hood/housing for Han® K 3/0, Han® K 3/2

| Identification | Part number | M | Drawing | Dimensions in mm |
|---|----------------|------------------|--|------------------|
| Hoods top entry  | 19 40 024 0461 | 3 x 25 |  | |
| top entry  | 19 40 024 0471 | 3 x 25 1 x 20 |  | |
| angled entry  | 19 40 024 0631 | 3 x 25 |  | |
| Han HC Modular top entry  | 19 40 024 0420 | 1 x 63 |  | |

Special hood/housing for Han® K 3/0, Han® K 3/2
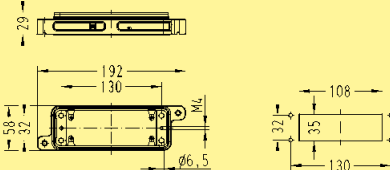
| Identification | Part number | M | Drawing | Dimensions in mm |
|--|-----------------------|------------------|--|------------------|
| Housings, bulkhead mounting  | 09 40 024 0311 | |  | |
| Housings, surface mounting straight version  | 19 40 024 1231 | 3 x 25 | View X  | |
| straight version  | 19 40 024 1271 | 3 x 25 1 x 20 |  | |
| horizontal version  | 19 40 024 0931 | 3 x 25 |  | Han HC Modular |
| horizontal version  | 19 40 024 0971 | 3 x 25 1 x 20 |  | |
| horizontal version  | 19 40 024 0914 | 1 x 50 |  | |

Stock items in bold type


Features

- Crimp termination
- Designed for thick cable insulations
- For crimp dies acc. to DIN 46 235
- For crimping tools with 13 t pressing force

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques according to DIN EN 60 512-5-2

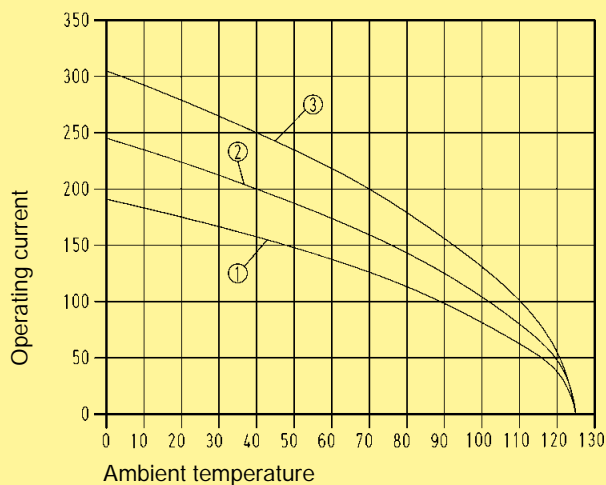

- ① Wire gauge 35 mm²
- ② Wire gauge 50 mm²
- ③ Wire gauge 70 mm²

Technical characteristics

| | |
|----------------|---|
| Specifications | DIN EN 60 664-1 DIN EN 61 984 EN 50 124-1 |
|----------------|---|

Inserts

| | |
|---------------------------------------|----------------------|
| Electrical data acc. to DIN EN 61 984 | |
| Rated current | 250 A |
| Rated voltage | 2000 V |
| Rated impulse voltage | 12 kV |
| Pollution degree | 3 |
| Insulation resistance | ≥ 10 ¹⁰ Ω |
| Material | polycarbonate |
| Limiting temperatures | -40 °C ... +125 °C |
| Flammability acc. to UL 94 | V 0 |
| Mechanical working life | ≥ 500 mating cycles |

Contacts


| | |
|----------------------------|---------------------------|
| Power contacts | |
| Material | Copper alloy |
| Surface | |
| - hard-silver plated | 3 μm Ag |
| Contact resistance | ≤ 0.3 mΩ |
| Crimp terminal | |
| - mm ² | 35 ... 70 mm ² |
| Max. insulation diameter | 18 mm |
| Crimp dies | acc. to DIN 46 325 |
| Pressing force requirement | 130 kN |




Hoods/Housings




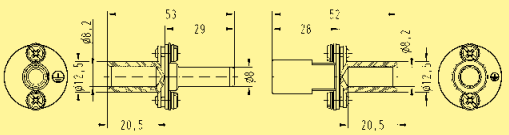
For technical details see chapter 31

Frame

| | |
|--|-----------------|
| Tightening torque of the fixing screws | 0.5 Nm |
| Material | stainless steel |

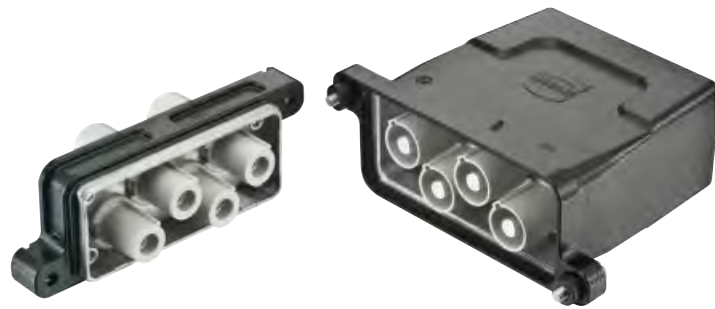

| Identification | Part-Number | | Drawings | Dimensions in mm |
|--|-----------------|-------------------|----------|--|
| | Male insert (M) | Female insert (F) | | |
| Han® HC Modular 250 Crimp terminal  | 09 11 001 3021 | | M |  |
| | | 09 11 001 3121 | F |  |

| Identification | Wire gauge mm ² | Part-Number | | Drawings | Dimensions in mm | | | | | | | | | | | | | | | | |
|--|-------------------------------|-------------------|---------------------|--|------------------|------------|---------------------|------------------|---|--------------------|----|-------|---------|--------------------|----|-------|----------|--------------------|----|-------|----------|
| | | Male contacts (M) | Female contacts (F) | | | | | | | | | | | | | | | | | | |
| Crimp contacts* Silver plated  | 35 | 09 11 000 6127 | 09 11 000 6227 |  | | | | | | | | | | | | | | | | | |
| | 50 | 09 11 000 6128 | 09 11 000 6228 | | | | | | | | | | | | | | | | | | |
| | 70 | 09 11 000 6129 | 09 11 000 6229 | | | | | | | | | | | | | | | | | | |
| PE crimp contacts  | 35 | 09 11 000 6104 | 09 11 000 6204 |  | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Tool identification</th> <th>Stripping length</th> <th>∅</th> </tr> </thead> <tbody> <tr> <td>35 mm²</td> <td>12</td> <td>22 mm</td> <td>8,45 mm</td> </tr> <tr> <td>50 mm²</td> <td>14</td> <td>22 mm</td> <td>10,25 mm</td> </tr> <tr> <td>70 mm²</td> <td>16</td> <td>22 mm</td> <td>11,75 mm</td> </tr> </tbody> </table> <p>* for stranded wire acc. to IEC 60 228 class 5</p> | | | | | | Wire gauge | Tool identification | Stripping length | ∅ | 35 mm ² | 12 | 22 mm | 8,45 mm | 50 mm ² | 14 | 22 mm | 10,25 mm | 70 mm ² | 16 | 22 mm | 11,75 mm |
| Wire gauge | Tool identification | Stripping length | ∅ | | | | | | | | | | | | | | | | | | |
| 35 mm ² | 12 | 22 mm | 8,45 mm | | | | | | | | | | | | | | | | | | |
| 50 mm ² | 14 | 22 mm | 10,25 mm | | | | | | | | | | | | | | | | | | |
| 70 mm ² | 16 | 22 mm | 11,75 mm | | | | | | | | | | | | | | | | | | |

| | | | | |
|-------|--|----------------|----------------|---|
| Tools | | 09 99 000 0332 | 09 99 000 0332 |  |
|-------|--|----------------|----------------|---|

* Crimp zone acc. to DIN EN 46 235

| Frame | Part number | Hoods/Housings | M | Part number |
|---------------------------------------|-----------------------|---|---------------|-----------------------|
| <p>4 poles, male</p> | 09 11 000 9937 | <p>Hood Han® 16 HPR enlarged</p> | 4 x 25 | 19 40 016 0478 |
| <p>4 poles, female</p> | 09 11 000 9938 | <p>Housing, bulkhead mounting* Han® 16 HPR enlarged</p> | — | 09 40 016 0368 |
| <p>Mounting frame Han® 16 HPR</p> | 09 40 000 9956 | | | |

Han HC
Modular

* HPR mounting frames of appropriate size from chapter 31 are not fitting for compatibility


Stock items in bold type

Current carrying capacity

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques according to DIN EN 60 512-5-2

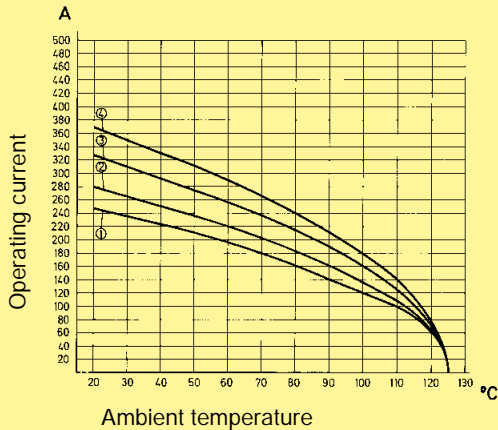

- ① Wire gauge 50 mm²
 - ② Wire gauge 70 mm²
 - ③ Wire gauge 95 mm²
 - ④ Wire gauge 120 mm²
- three contacts in Han® 24 HPR

Technical characteristics

| | |
|-----------------------------------|----------------------------------|
| Specifications | DIN EN 60 664-1 DIN EN 61 984 |
| Approvals | |
| Inserts | |
| Number of contacts | 1, 2, 3 or 3 + PE |
| Electrical data acc. to EN 61 984 | |
| without adapter | 350 A 2000 V 12 kV 3 |
| Rated current | 350 A |
| Rated voltage | 2000 V |
| Rated impulse voltage | 12 kV |
| Pollution degree | 3 |
| with adapter | 350 A 4000 V 18 kV 3 |
| Rated current | 350 A |
| Rated voltage | 4000 V |
| Rated impulse voltage | 18 kV |
| Pollution degree | 3 |
| Insulation resistance | ≥ 10 ¹⁰ Ω |
| Material | polyamide |
| Limiting temperatures | -40 °C ... +125 °C |
| Flammability acc. to UL 94 | V 0 |
| Mechanical working life | |
| - mating cycles | ≥ 500 |

| Contacts | | | | | | | | | | | | | |
|----------------------------|---|-----------------|----|----|-----|----|-----|----|---|----|----|----|----|
| Material | copper alloy | | | | | | | | | | | | |
| Surface | silver | | | | | | | | | | | | |
| Contact resistance | ≤ 0.2 mΩ | | | | | | | | | | | | |
| Axial screw termination | | | | | | | | | | | | | |
| - Wire gauge ¹⁾ | 35 ... 120 mm ² | | | | | | | | | | | | |
| - AWG | 1 ... 0000 | | | | | | | | | | | | |
| - Stripping length | 19 ... 20 mm | | | | | | | | | | | | |
| - Max. cable diameter | 19.5 mm | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>mm²</th> <th>35</th> <th>50</th> <th>70</th> <th>95</th> <th>120</th> </tr> </thead> <tbody> <tr> <td>Nm</td> <td>8</td> <td>10</td> <td>12</td> <td>14</td> <td>16</td> </tr> </tbody> </table> | mm ² | 35 | 50 | 70 | 95 | 120 | Nm | 8 | 10 | 12 | 14 | 16 |
| mm ² | 35 | 50 | 70 | 95 | 120 | | | | | | | | |
| Nm | 8 | 10 | 12 | 14 | 16 | | | | | | | | |
| - Tightening torque | | | | | | | | | | | | | |
| Screw terminal | | | | | | | | | | | | | |
| - Thread | M 10 | | | | | | | | | | | | |
| - Wrench size | SW 17 | | | | | | | | | | | | |
| - Tightening torque | 14 Nm | | | | | | | | | | | | |

Hoods/Housings
For technical details see chapter 31

| | |
|--|-----------------|
| Frame | |
| Tightening torque of the fixing screws | 0.5 Nm |
| Tightening torque of the cross-tying screws on the frame for 4 poles | 1.5 Nm |
| Material | stainless steel |

¹⁾ geometric wire gauge



Modular
High Current Connector System

| Identification | Part number | | Wire gauge | Drawing | Dimensions in mm |
|---|--|--|---|---------|------------------|
| | Male contact | Female contact | | | |
| <p>Contacts with Screw terminal for housing bulkhead mounting</p> | 09 11 001 2655 | 09 11 001 2755 | for cable lug up to max. 120 mm ² | | |
| <p>with Axial screw termination</p> | 09 11 001 2651 09 11 001 2652 | 09 11 001 2751 09 11 001 2752 | 35 ... 70 mm ² 95 ... 120 mm ² | | |
| <p>PE contact with Axial screw termination</p> | 09 11 000 6156 | 09 11 000 6256 | 35 ... 70 mm ² | | |
| <p>Hexagonal driver Adapter (SW 5)</p> | 09 99 000 0371 | | | | |
| Identification | Part number | M | SW | Drawing | Dimensions in mm |
| <p>Hexagonal adapter metal version with O-Ring</p> | 19 36 000 5134 19 36 000 5135 | 25 32 | 30 40 | | |

Han HC
Modular


Features

- Crimp termination
- Compatible to Han® HC Modular 350 axial screw termination
- Designed for thick cable insulations
- For crimp dies according to DIN 46 235

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques according to DIN EN 60 512-5-2

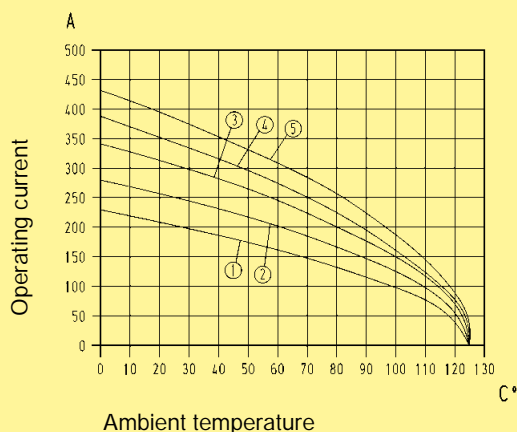

Wire gauge

- | | |
|-----------------------|----------------------|
| ① 35 mm ² | ② 50 mm ² |
| ③ 70 mm ² | ④ 95 mm ² |
| ⑤ 120 mm ² | |

Technical characteristics

| | |
|----------------|----------------------------------|
| Specifications | DIN EN 60 664-1 DIN EN 61 984 |
| Approvals | GL |

Inserts

| | |
|--|-----------------------------|
| Number of contacts | 1, 2, 3 or 3 + PE |
| Electrical data acc. to EN 61 984 | |
| without adapter | 350 A 2000 V 12 kV 3 |
| Rated current | 350 A |
| Rated voltage | 2000 V |
| Rated impulse voltage | 12 kV |
| Pollution degree | 3 |
| with adapter | 350 A 4000 V 18 kV 3 |
| Rated current | 350 A |
| Rated voltage | 4000 V |
| Rated impulse voltage | 18 kV |
| Pollution degree | 3 |
| Insulation resistance | ≥ 10 ¹⁰ Ω |
| Material | polyamide |
| Limiting temperatures | -40 °C ... +125 °C |
| Flammability acc. to UL 94 | V 0 |
| Mechanical working life - mating cycles | ≥ 500 |

Contacts

| | |
|----------------------------|----------------------------|
| Material | copper alloy |
| Surface | |
| - hard-silver plated | 3 μm Ag |
| Contact resistance | ≤ 0,3 mΩ |
| Crimp terminal | |
| - mm ² | 35 ... 120 mm ² |
| Max. insulation diameter | 22 mm |
| Crimp dies | acc. to DIN 46 235 |
| Pressing force requirement | 130 kN |


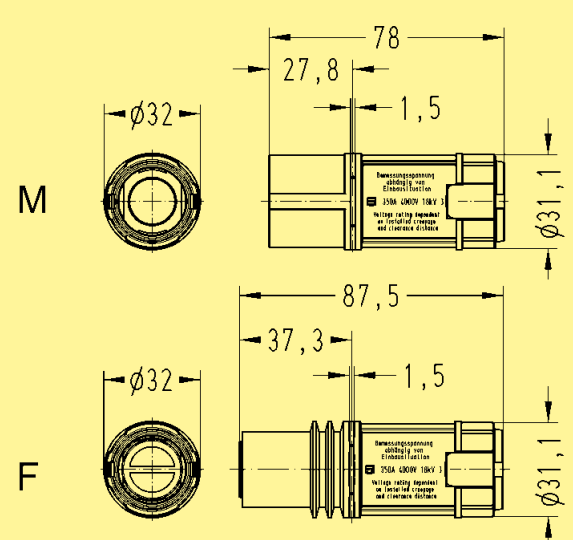
Hoods/Housings

For technical details see chapter 31



Frame

| | |
|--|-----------------|
| Tightening torque of the fixing screws | 0,5 Nm |
| Tightening torque of the cross-tying screws on the frame for 4 poles | 1,5 Nm |
| Material | stainless steel |



| Identification | Part number | | Drawing | Dimensions in mm |
|---|-----------------------|-----------------------|---|------------------|
| | Male insert (M) | Female insert (F) | | |
| Han® HC Modular 350 Crimp terminal  | 09 11 001 3001 | 09 11 001 3101 |  | |

Han HC Modular
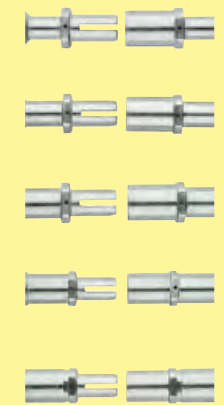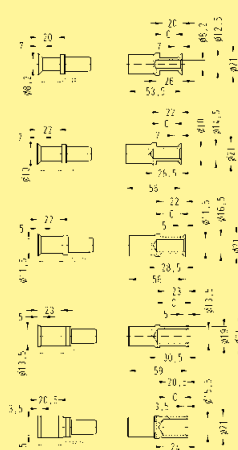
| Identification | Wire gauge (mm ²) | Part number | | Drawing | Dimensions in mm | | | | | | | | | | | | | | | | | | |
|---|-------------------------------|------------------|----------------|--|------------------|---|------------------|--------------------|-----|-------|--------------------|----|-------|--------------------|------|-------|--------------------|------|-------|---------------------|------|-------|--|
| | | Male contact | Female contact | | | | | | | | | | | | | | | | | | | | |
| Crimp contacts* silver plated  | | | |  | | | | | | | | | | | | | | | | | | | |
| | | | | <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>35 mm²</td> <td>8,2</td> <td>26 mm</td> </tr> <tr> <td>50 mm²</td> <td>10</td> <td>28 mm</td> </tr> <tr> <td>70 mm²</td> <td>11,5</td> <td>28 mm</td> </tr> <tr> <td>95 mm²</td> <td>13,5</td> <td>30 mm</td> </tr> <tr> <td>120 mm²</td> <td>15,5</td> <td>24 mm</td> </tr> </tbody> </table> | Wire gauge | ∅ | Stripping length | 35 mm ² | 8,2 | 26 mm | 50 mm ² | 10 | 28 mm | 70 mm ² | 11,5 | 28 mm | 95 mm ² | 13,5 | 30 mm | 120 mm ² | 15,5 | 24 mm | |
| Wire gauge | ∅ | Stripping length | | | | | | | | | | | | | | | | | | | | | |
| 35 mm ² | 8,2 | 26 mm | | | | | | | | | | | | | | | | | | | | | |
| 50 mm ² | 10 | 28 mm | | | | | | | | | | | | | | | | | | | | | |
| 70 mm ² | 11,5 | 28 mm | | | | | | | | | | | | | | | | | | | | | |
| 95 mm ² | 13,5 | 30 mm | | | | | | | | | | | | | | | | | | | | | |
| 120 mm ² | 15,5 | 24 mm | | | | | | | | | | | | | | | | | | | | | |

for stranded wire according to IEC 60 228 Class 5

* Crimp zone acc. to EN 46 235

Stock items in bold type

Han HC Modular

Frame


Part number

Hoods/Housings

M

Part number

1 pole




09 11 000 9951

Hoods
Han® HPR 6 B



25
32

19 40 006 0411
19 40 006 0412




Housings, bulk-head mounting
Han® HPR 6 B




-

09 40 006 0311



4 poles




09 11 000 9954

Hoods
Han® M 48 B




4 x 25

19 37 048 0401



4 poles




09 11 000 9955












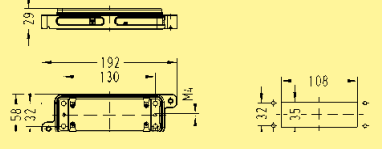
Housings, bulk-head mounting
Han® M 48 B



-

09 37 048 0301



| Frame | Part number | Hoods/Housings | M | Part number |
|---|-----------------------|---|---------------|------------------------------|
| <p>2 poles</p>   <p>enclosed separately</p> | <p>09 11 000 9952</p> | <p>Hoods Han® HPR 16 B</p>   | <p>2 x 25</p> | <p>19 40 016 0431</p> |
| | | <p>Housings, bulk-head mounting Han® HPR 16 B</p>   | | |
| <p>2 poles</p>   <p>enclosed separately</p> | <p>09 11 000 9956</p> | <p>Hoods Han® HPR 24 B</p>   | <p>2 x 32</p> | <p>19 40 024 0432</p> |
| | | <p>Housings, bulk-head mounting Han® HPR 24 B</p>   | | |


Han HC Modular

* A working voltage of 4000 V is only possible to realize by using a hexagonal adapter and the HARTING cable gland, in order to realize the clearance and creepage distance according to DIN EN 60 664-1.

Stock items in bold type

Frame

3 poles



enclosed separately

Part number

09 11 000 9963

Hoods/Housings

Hoods
Han® HPR 24 B



3 x 25

19 40 024 0461




Hoods
Han® HPR 24 B



3 x 32

19 40 024 0467



Housings, bulk-head mounting
Han® HPR 24 B



-

09 40 024 0311


Drawing see page 14.17

Housings, surface mounting
Han® HPR 24 B
horizontal version



3 x 25

19 40 024 0931

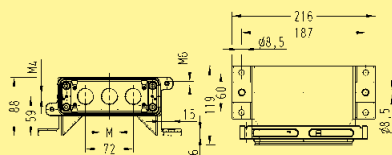


Housings, surface mounting
Han® HPR 24 B
straight version



3 x 25






19 40 024 1231



Han HC Modular

* A working voltage of 4000 V is only possible to realize by using a hexagonal adapter and the HARTING cable gland, in order to realize the clearance and creepage distance according to DIN EN 60 664-1.

Stock items in bold type

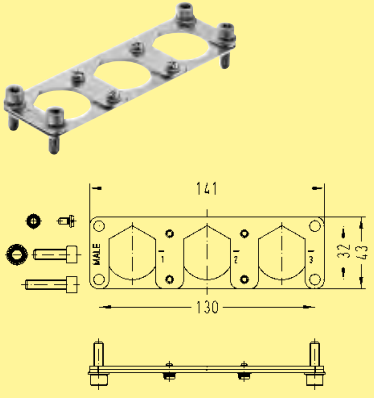
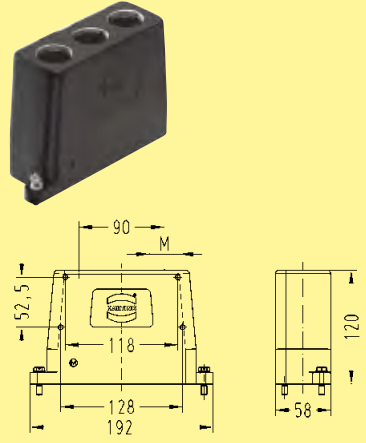
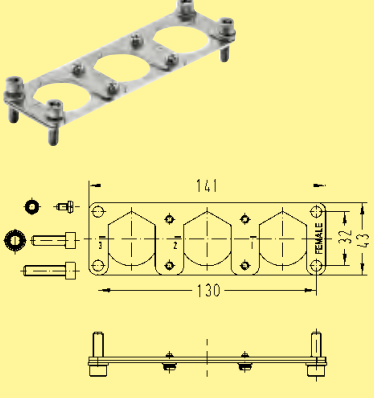
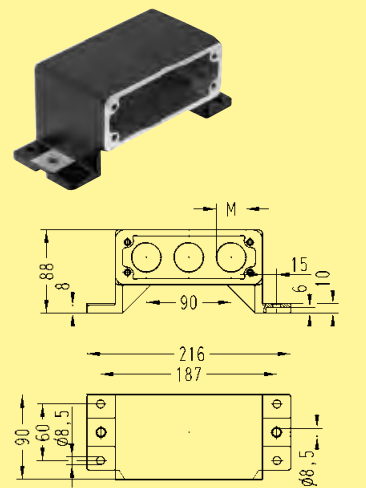
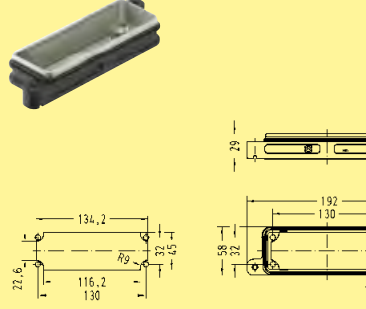
| Frame | Part number | Hoods/Housings | M | Part number | | | |
|---|-----------------------|---|--|-----------------------|--|--------------|-----------------------|
| <p>3 poles, male</p>  | <p>09 11 000 9957</p> | <p>Hoods* Han® 24 HPR enlarged</p>  | <p>3x 32</p> | <p>19 40 024 0468</p> | | | |
| <p>3 poles, female</p>  | | <p>09 11 000 9958</p> | | | <p>Housings, surface mounting Han® 24 HPR enlarged, horizontal version</p>  <p>Required housing, bulkhead mounting, 09 40 024 0368 not included, must be ordered separately</p> | <p>3x 32</p> | <p>19 40 024 0968</p> |
| | | | <p>Housings, bulkhead mounting Han® 24 HPR enlarged</p>  | | <p>09 40 024 0368</p> | | |

Han HC
Modular

* A working voltage of 4000 V is only possible to realize by using a hexagonal adapter and the HARTING cable gland, in order to realize the clearance and creepage distance according to DIN EN 60 664-1.

Stock items in bold type

Han HC Modular
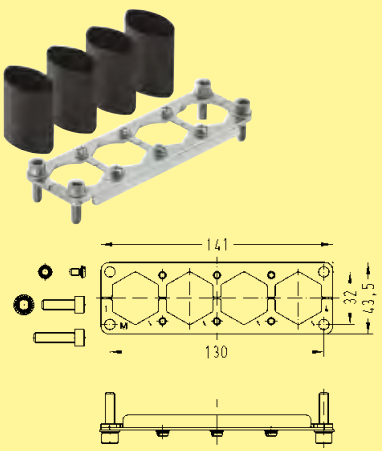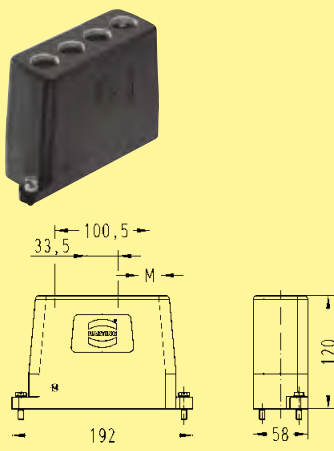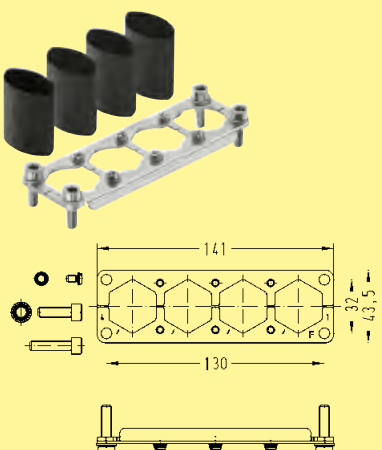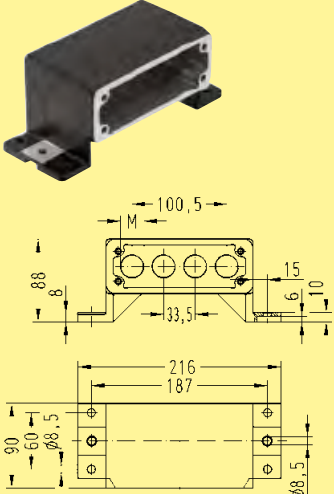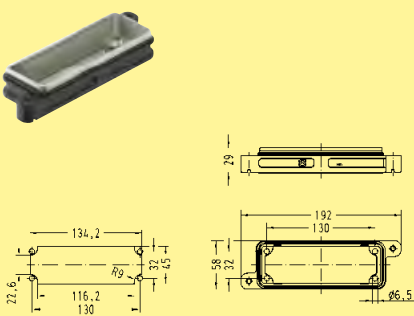
| Frame | Part number | Hoods/Housings | M | Part number |
|---|-----------------------|--|--------------|-----------------------|
| <p>4 poles, male</p>  | <p>09 11 000 9964</p> | <p>Hoods* Han® 24 HPR enlarged</p>  | <p>4x 25</p> | <p>19 40 024 0478</p> |
| <p>4 poles, female</p>  | <p>09 11 000 9965</p> | <p>Housings, surface mounting Han® 24 HPR enlarged, horizontal version</p>  <p>Required housing, bulkhead mounting, 09 40 024 0368 not included, must be ordered separately</p> | <p>4x 25</p> | <p>19 40 024 0978</p> |
| | | <p>Housings, bulkhead mounting Han® 24 HPR enlarged</p>  | | <p>09 40 024 0368</p> |

* A working voltage of 4000 V is only possible to realize by using a hexagonal adapter and the HARTING cable gland, in order to realize the clearance and creepage distance according to DIN EN 60 664-1.

Stock items in bold type

Assembly instructions

Remarks on the axial screw termination see chapter 00

Step 1: The outer diameter of the cable must not exceed 19.5 mm.

Strip the cable by 19 mm.

Insert the cable through hood.








Step 2: Press the Han NC contact on the cable strand and apply tightening torque according table 1 by using a tightening torques tool. Take care that all cable strands fit completely inside the contact termination cavity. During assembling adhere the cable and the contact to minimise axial movement or twisting.

Step 3: Move the perforated plate D across the HC contacts.

Step 4: Fit frame E onto the hexagon shape of the HC contact. Coding can be arranged by turning the contact within 60° steps. Bolt the frame E together with perforated plate D.

Step 5: Push back the packet inside the good.

Step 6: Tighten the four M3 (tightening torque 0.5 Nm) screws and the cable gland according manufacturer recommendation.

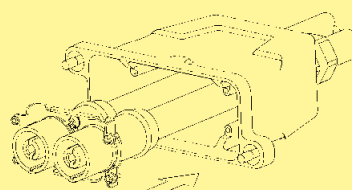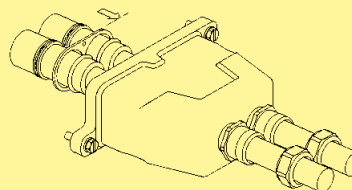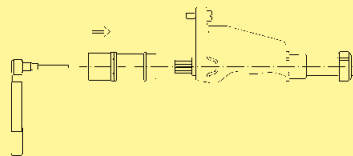

During the assembly of the frame for 4 poles the following tightening torques have to be taken into consideration:

A = 0.5 Nm

B = 1.5 Nm


C = 0.25 Nm

Current carrying capacity

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques according to DIN EN 60 512-5-2

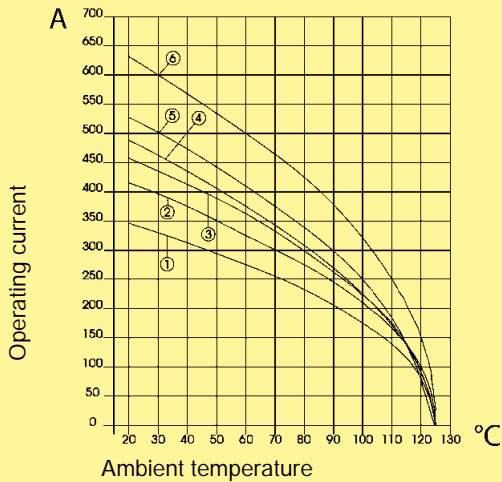

- ① Wire gauge 70 mm²
 - ② Wire gauge 95 mm²
 - ③ Wire gauge 120 mm²
 - ④ Wire gauge 150 mm²
 - ⑤ Wire gauge 185 mm²
 - ⑥ Wire gauge 240 mm²
- with cable SHXAFO1x240, 4 kV

Technical characteristics

| | |
|-----------------------------------|----------------------------------|
| Specifications | DIN EN 60 664-1 DIN EN 61 984 |
| Approvals | |
| Inserts | |
| Number of contacts | 1, 2 |
| Electrical data acc. to EN 61 984 | 650 A 4000 V 18 kV 3 |
| Rated current | 650 A |
| Rated voltage | 4000 V |
| Rated impulse voltage | 18 kV |
| Pollution degree | 3 |
| Insulation resistance | ≥ 10 ¹⁰ Ω |
| Material | polyamide |
| Limiting temperatures | -40 °C ... +125 °C |
| Flammability acc. to UL 94 | V 0 |
| Mechanical working life | |
| - mating cycles | ≥ 500 |

| | | | | | | | | | | | | | |
|----------------------------|--|-----------------|-----|-----|-----|-----|-----|----|----|----|----|----|----|
| Contacts | | | | | | | | | | | | | |
| Material | copper alloy | | | | | | | | | | | | |
| Surface | silver | | | | | | | | | | | | |
| Contact resistance | ≤ 0.2 mΩ | | | | | | | | | | | | |
| Axial screw termination | | | | | | | | | | | | | |
| - Wire gauge ¹⁾ | 70 ... 185 mm ² | | | | | | | | | | | | |
| - MCM | 138 ... 350 | | | | | | | | | | | | |
| - Stripping length | 23 ... 25 mm | | | | | | | | | | | | |
| - Max. cable diameter | 26.5 mm | | | | | | | | | | | | |
| | <table border="1"> <tr> <td>mm²</td> <td>70</td> <td>95</td> <td>120</td> <td>150</td> <td>185</td> </tr> <tr> <td>Nm</td> <td>12</td> <td>14</td> <td>16</td> <td>17</td> <td>18</td> </tr> </table> | mm ² | 70 | 95 | 120 | 150 | 185 | Nm | 12 | 14 | 16 | 17 | 18 |
| mm ² | 70 | 95 | 120 | 150 | 185 | | | | | | | | |
| Nm | 12 | 14 | 16 | 17 | 18 | | | | | | | | |
| - Tightening torque | | | | | | | | | | | | | |
| Screw terminal | | | | | | | | | | | | | |
| - Thread | M 12 | | | | | | | | | | | | |
| - Tightening torque | 16 ... 18 Nm | | | | | | | | | | | | |


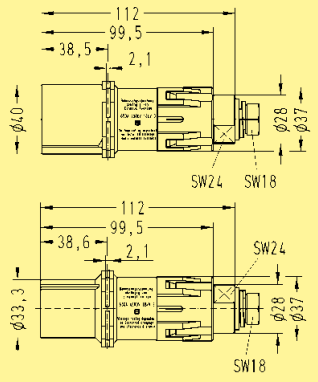



Hoods/Housings
For technical details see chapter 31

| | |
|--|-----------------|
| Frame | |
| Tightening torque of the fixing screws | 0.5 Nm |
| Material | stainless steel |

¹⁾ geometric wire gauge



Modular
High Current Connector System

| Identification | Part number | | Wire gauge | Drawing | Dimensions in mm |
|---|----------------|----------------|----------------------------|---|--|
| | Male contact | Female contact | | | |
| <p>Contacts with screw terminal for housing bulkhead mounting</p>  | 09 11 001 2675 | 09 11 001 2775 | 70 ... 240 mm ² |  |  <p>Please ensure to hold up the contact with a wrench size 24 to apply the tightening torque</p> |
| <p>with axial screw terminal</p>  | | | | | |
| <p>Hexagonal driver Adapter (SW 8)</p>  | 09 99 000 0372 | | | | |

Han HC
Modular

Features

- Crimp termination
- Plug compatible to Han® HC Modular 650 with axial screw terminal
- Contact in one piece

Technical characteristics

| | |
|----------------|----------------------------------|
| Specifications | DIN EN 61 984 DIN EN 60 664-1 |
|----------------|----------------------------------|

Inserts

| | |
|---|-----------------------------|
| Number of contacts | 1 or 2 |
| Electrical data acc. to EN 61 984 without adapter | 650 A 2000 V 12 kV 3 |
| Rated current | 650 A |
| Rated voltage | 2000 V |
| Rated impulse voltage | 12 kV |
| Pollution degree | 3 |
| with adapter | 650 A 4000 V 18 kV 3 |
| Rated current | 650 A |
| Rated voltage | 4000 V |
| Rated impulse voltage | 18 kV |
| Pollution degree | 3 |
| Insulation resistance | ≥ 10 ¹⁰ Ω |
| Material | polyamide |
| Limiting temperatures | -40 °C ... +125 °C |
| Flammability acc. to UL 94 | V 0 |
| Mechanical working life - mating cycles | ≥ 500 |

Contacts

| | |
|-----------------------------|---------------------|
| Material | copper alloy |
| Surface | |
| - hard-silver plated | 3 μm Ag |
| Contact resistance | ≤ 0,3 mΩ |
| Crimp terminal | |
| - mm ² | 240 mm ² |
| Max. insulation diameter | |
| Crimp die acc. to DIN 46235 | |
| Pressing force requirement | 130 kN |

Hoods/Housings

For technical details see chapter 31


Frame

| | |
|---|-----------------|
| Tightening torque of the fixing screws | 0,5 Nm |
| Material | stainless steel |

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques according to DIN EN 60 512-5-2

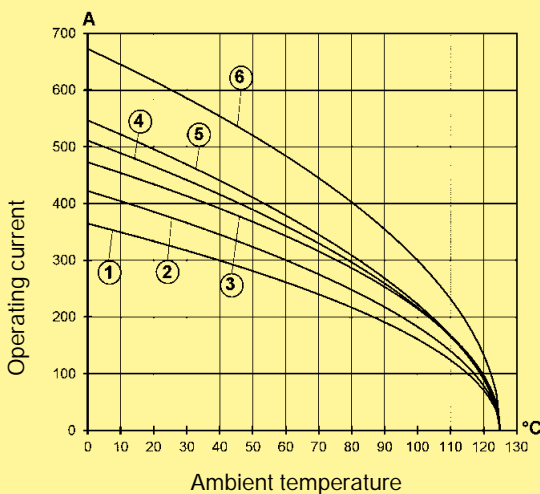

- | | |
|----------------------------------|----------------------------------|
| ① Wire gauge 70 mm ² | ② Wire gauge 95 mm ² |
| ③ Wire gauge 120 mm ² | ④ Wire gauge 150 mm ² |
| ⑤ Wire gauge 185 mm ² | ⑥ Wire gauge 240 mm ² |
- three contacts in Han® 24 HPR



Modular High Current Connector System

| Identification | Part-Number | | Drawings | Dimensions in mm |
|--------------------------------------|-----------------|-------------------|----------|------------------|
| | Male insert (M) | Female insert (F) | | |
| Han® HC module 650 Crimp terminal | 09 11 001 3012 | 09 11 001 3112 | | |












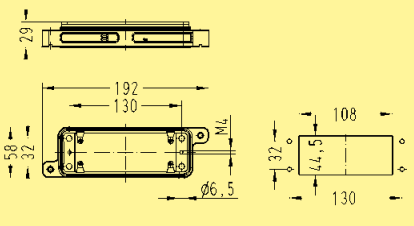
| Identification | Wire gauge mm ² | Part-Number | | Drawings | Dimensions in mm | | | | | | | | | | | | | | | | | | | | | |
|----------------------------------|-------------------------------|-------------------|---------------------|--|------------------|---------|-------------------|--------------------|------|-------|--------------------|------|-------|---------------------|------|-------|---------------------|----|-------|---------------------|----|-------|---------------------|------|-------|--|
| | | Male contacts (M) | Female contacts (F) | | | | | | | | | | | | | | | | | | | | | | | |
| Crimp contacts* Silver plated | 70 | 09 11 000 6161 | 09 11 000 6261 | <table border="1" style="margin-top: 10px;"> <thead> <tr> <th>Wire gauge</th> <th>Ø in mm</th> <th>Strip-ping length</th> </tr> </thead> <tbody> <tr> <td>70 mm²</td> <td>11.5</td> <td>42 mm</td> </tr> <tr> <td>95 mm²</td> <td>13.5</td> <td>42 mm</td> </tr> <tr> <td>120 mm²</td> <td>15.5</td> <td>42 mm</td> </tr> <tr> <td>150 mm²</td> <td>17</td> <td>42 mm</td> </tr> <tr> <td>185 mm²</td> <td>19</td> <td>42 mm</td> </tr> <tr> <td>240 mm²</td> <td>21.5</td> <td>46 mm</td> </tr> </tbody> </table> <p>* for stranded wire acc. to IEC 60 228 class 5</p> | Wire gauge | Ø in mm | Strip-ping length | 70 mm ² | 11.5 | 42 mm | 95 mm ² | 13.5 | 42 mm | 120 mm ² | 15.5 | 42 mm | 150 mm ² | 17 | 42 mm | 185 mm ² | 19 | 42 mm | 240 mm ² | 21.5 | 46 mm | |
| Wire gauge | Ø in mm | Strip-ping length | | | | | | | | | | | | | | | | | | | | | | | | |
| 70 mm ² | 11.5 | 42 mm | | | | | | | | | | | | | | | | | | | | | | | | |
| 95 mm ² | 13.5 | 42 mm | | | | | | | | | | | | | | | | | | | | | | | | |
| 120 mm ² | 15.5 | 42 mm | | | | | | | | | | | | | | | | | | | | | | | | |
| 150 mm ² | 17 | 42 mm | | | | | | | | | | | | | | | | | | | | | | | | |
| 185 mm ² | 19 | 42 mm | | | | | | | | | | | | | | | | | | | | | | | | |
| 240 mm ² | 21.5 | 46 mm | | | | | | | | | | | | | | | | | | | | | | | | |
| | 95 | 09 11 000 6162 | 09 11 000 6262 | | | | | | | | | | | | | | | | | | | | | | | |
| | 120 | 09 11 000 6163 | 09 11 000 6263 | | | | | | | | | | | | | | | | | | | | | | | |
| | 150 | 09 11 000 6164 | 09 11 000 6264 | | | | | | | | | | | | | | | | | | | | | | | |
| | 185 | 09 11 000 6165 | 09 11 000 6265 | | | | | | | | | | | | | | | | | | | | | | | |
| | 240 | 09 11 000 6168 | 09 11 000 6268 | | | | | | | | | | | | | | | | | | | | | | | |

Han HC Modular

* Crimp area acc. to DIN EN 46 235

Stock items in bold type


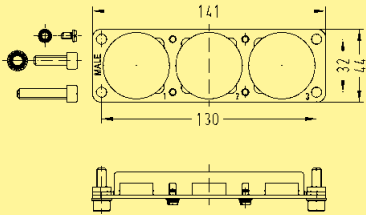

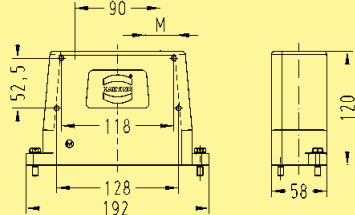

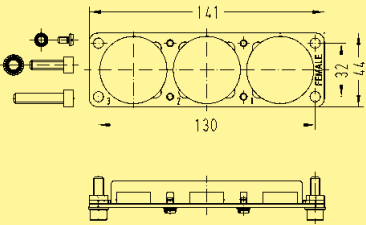





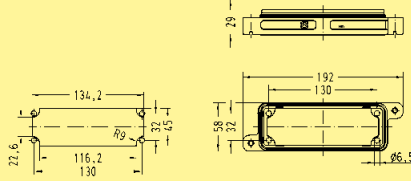
Han HC Modular

| Frame | Part number | Hoods/Housings | M | Part number |
|--|------------------------------|---|---------------|------------------------------|
| <p>1 pole</p>   | <p>09 11 000 9971</p> | <p>Hood Han® HPR 6 B</p>   | <p>40</p> | <p>19 40 006 0418</p> |
| <p>2 poles</p>   | <p>09 11 000 9972</p> | <p>Hood Han® HPR 24 B</p>   | <p>2 x 40</p> | <p>19 40 024 0438</p> |
| <p>Mounting frame Han® HPR 24 B</p>   | <p>09 40 000 9955</p> | <p>Housings bulk-head mounting* Han® HPR 24 B</p>   | <p>-</p> | <p>09 40 024 0311</p> |

14
24

* HPR mounting frames of appropriate size from chapter 31 are not fitting for compatibility

Stock items in bold type

| Frame | Part number | Hoods/Housings | M | Part number |
|---|------------------------------|---|---------------------|------------------------------|
| <p>3 pins, male</p>   | <p>09 11 000 9973</p> | <p>Hoods** Han® 24 HPR enlarged</p>   | <p>3x 32</p> | <p>19 40 024 0468</p> |
| <p>3 pins, female</p>   | <p>09 11 000 9974</p> | <p>Housings, surface mounting** Han® 24 HPR enlarged, horizontal version</p>   <p>Required housing, bulkhead mounting, 09 40 024 0368 not included, must be ordered separately</p> | <p>3x 32</p> | <p>19 40 024 0968</p> |
| <p>Mounting frame Han® HPR 24 B</p>   | <p>09 40 000 9955</p> | <p>Housings, bulkhead mounting* Han® 24 HPR enlarged</p>   | | <p>09 40 024 0368</p> |

Han HC
Modular

** A working voltage of 4000 V is only possible to realize by using a hexagonal adapter and the HARTING cable gland, in order to realize the clearance and creepage distance according to DIN EN 60 664-1.

Stock items in bold type

Assembly instructions

1. Strip cable to 23+2 mm.


2. Push conductor through the cable gland and the housing. Push the stripped end of the conductor into the termination entry of the module until the insulation touches the contact.

3. To tighten the axial screw, a hexagonal wrench size 8 is needed. Insert the hexagonal wrench on the mating side of the contact. At the same time, push the conductor over the axial screw. The locking screw has to be tightened with the recommended tightening torque that is determined by the conductor's cross section.

4. Once the modules are terminated, they are mounted into the housing by using two metal frames (tightening torque of the fixing screws = 0.5 Nm). The modules have 4 pegs formed by 2 parallel ribs (each peg shapes like a "H"). Each rib takes 1 pole frame, where the lateral link has to go into the relief of the frame. The 2 pole frames have 2 cutouts on the wall which get fitted to the "H"-shaped pegs (see figure). The heads of the screws have to face the mating direction of the module. Coding can be established by rotating the contact by 90 degrees. Therefore it is important that the corresponding modules are assembled in the correct position otherwise mating is not possible.

5. After assembling the modules in the housing, the tightening torque of the locking screw can be checked and corrected if necessary.

6. After final assembly of the contacts, the user should ensure that the cable is adequately strain relieved to protect the contact from radial stress.

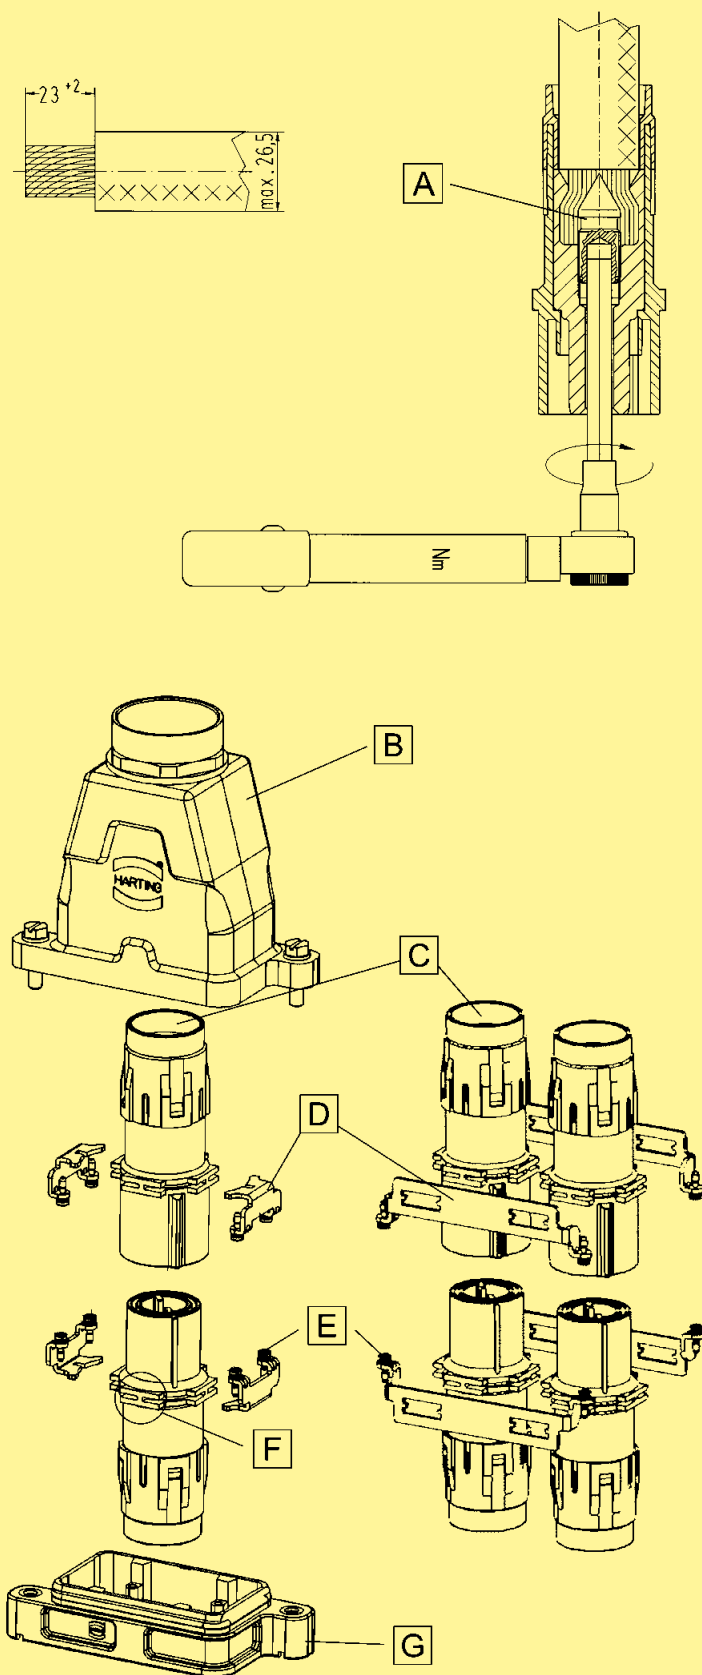

A - Axial screw, B - Hood, C - Termination entry,
D - Frame, E - Fixing screws, F - parallel ribs with
H-shape, G - Housings bulkhead mounting,

Innovative High Current Connectors for Power Transmission on Trains



Han HC
Modular

Source: Stadtwerke München, Munich

The Split hood and housing "open system" of the Han® 24HPR EasyCon with the innovative concept for shielded cables is an excellent solution for the versatile power requirements and the rapid moving operational cycle on Trains.

In use are the approved Han® HC Modular 350A and 650A Crimp-Contacts.



General description


- High current connector for motor applications in the field of Railway rolling stock
- Robust and compact design
- Easy assembly due to split hood and surface mounted housing
- High EMC resistance
- Large space for cables










Technical characteristics

| | |
|---|--|
| Material | Aluminium die-cast |
| Surface | Powder-coated, RAL 9005 (black) |
| Limiting temperatures | -40 °C ... 125 °C |
| Locking | Screw locking, M6 stainless steel |
| Frame | 3 and 4 contacts for Han® HC Modular 350 stainless steel 3 contacts for Han® HC Modular 650 stainless steel |
| Frames | Short and long version stainless steel |
| Cable gland | Special cable gland with self tightening clamp for shielded cables |
| Degree of protection acc. to EN 60 529 in locked position | IP 68 |









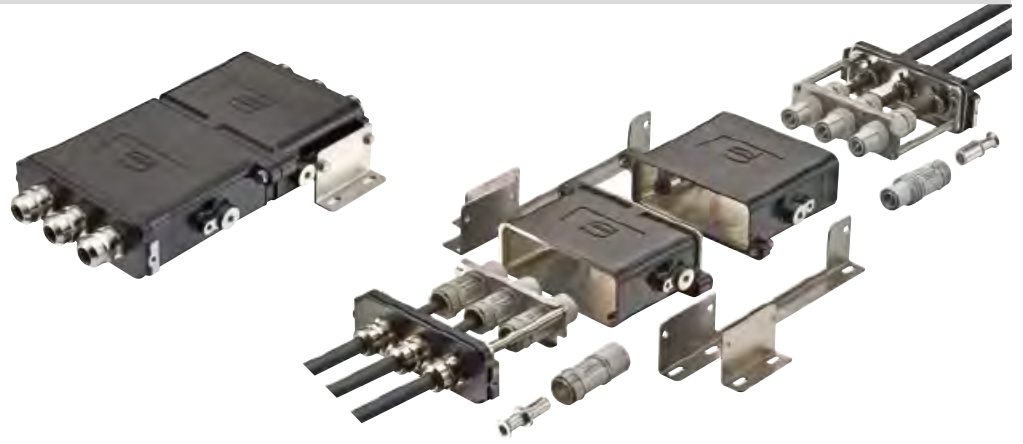





Features

- Suitable for extreme environmental conditions
- Many assembly possibilities due to separate assembly panels
- External termination of PE termination on hood and surface mounted housing
- New cable gland for secure and a visible connection of screening braid of shielded cables.



| Identification | Part-Number | Drawing | Dimensions in mm |
|---|-----------------------|--|---|
| <p>Hood</p>  | <p>09 40 024 0451</p> |  |  |
| <p>Housing, surface mounting</p>  | <p>09 40 024 0951</p> |  |  |
| <p>Housing, bulkhead mounting Han® HPR enlarged</p>  | <p>09 40 024 0368</p> |  |  |

Han HC
Modular

| Identification | Part-Number | Drawing | Dimensions in mm |
|---|---|--|------------------|
| <p>Covers for Han® 24 HPR EasyCon hood and surface mounting housing</p>  <p>3 x M25</p>  <p>4 x M25</p>  <p>3 x M32</p> | <p>19 40 024 9901</p> <p>19 40 024 9902</p> <p>19 40 024 9903</p> |    | |
| <p>Frames for 3 x Han® HC Modular 350 in Han® 24 HPR EasyCon hood and surface mounting housing</p> <p>Han HC Modular</p>  <p>Male</p>  <p>Female</p> <p>for 4 x Han® HC Modular 350 in Han® 24 HPR EasyCon hood and surface mounting housing</p>  <p>Male</p>  <p>Female</p> | <p>09 40 024 9911</p> <p>09 40 024 9912</p> <p>09 40 024 9913</p> <p>09 40 024 9914</p> | <p>Included in kit: 2 x distance bolt (SW 7) 4 x M4 screw 4 x washer SK S4</p>   <p>Included in kit: 2 x distance bolt (SW 7) 4 x M4 screw 4 x washer SK S4 4 x heat shrink tube</p>   | |

Identification

Part-Number


Drawing

Dimensions in mm

Mounting panels


for Han® 24 HPR EasyCon
hood and surface mounting housing

Long version



09 40 000 9925

Included in kit:
6 x washer M6
6 x M6 screw

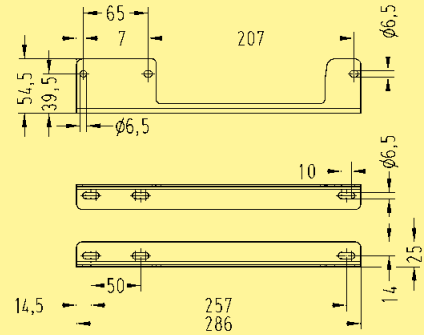


Short version






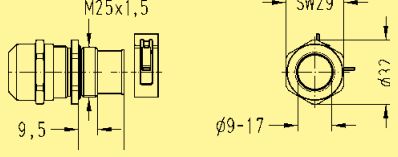
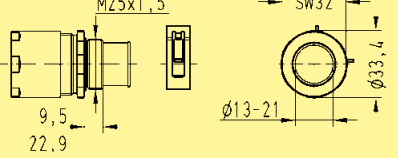
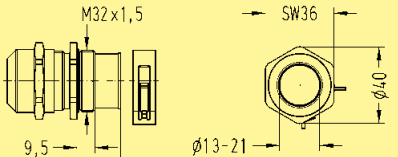
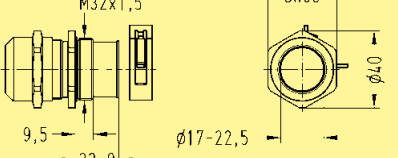
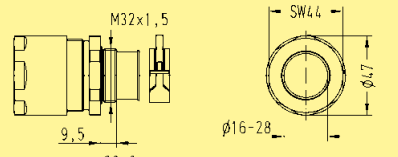



09 40 000 9926

Included in kit:
4 x washer M6
4 x M6 screw



Han HC
Modular

| Identification | Part-Number | Drawing | Dimensions in mm |
|---|---|--|---|
| <p>Cable glands M25</p> <p>For cable Ø 9 - 17 mm</p>  <p>For cable Ø 13 - 21 mm</p>  <p>M32</p> <p>For cable Ø 13 - 21 mm</p>  <p>For cable Ø 17 - 22.5 mm</p>  <p>For cable Ø 16 - 28 mm</p>  | <p>19 00 000 5013</p> <p>19 00 000 5019</p> <p>19 00 000 5014</p> <p>19 00 000 5015</p> <p>19 00 000 5022</p> |      | <p>SW29 ø17 ø9-17</p> <p>SW32 ø33,4 ø13-21</p> <p>SW36 ø40 ø13-21</p> <p>SW36 ø40 ø17-22,5</p> <p>SW44 ø47 ø16-28</p> |
| <p>Assembly tool for shielding clamp</p>  | <p>09 99 000 0334</p> | | |

Han HC Modular



Features

- Easy assembly
- Good EMC features
- Secure termination, easy to control
- Vibration resistant acc. to DIN EN 61 373 Category 1B (Category 2 possible with usage of M6 distance bolts)
- Ideal motor / drive connector for transportation sector

Technical characteristics

| Specifications | DIN EN 60 664-1 DIN EN 61 984 |
|--|---|
| Inserts | |
| Number of contacts | i. e. 4, 5, 6, 10 depending on the frame |
| Electrical data acc. to EN 61 984 | 350/650 A 4000 V 18 kV 3 |
| Rated current | 350/650 A |
| Rated voltage | 4000 V |
| Rated impulse voltage | 18 kV |
| Pollution degree | 3 |
| Insulation resistance | ≥ 10 ¹⁰ Ω |
| Material | polyamide |
| Limiting temperatures | -40 °C ... +125 °C |
| Flammability acc. to UL 94 | V 0 |
| Mechanical working life - mating cycles | ≥ 500 |

Contacts Han® HC Modular 350

| | |
|--------------------------------|----------------------------|
| Material | copper alloy |
| Surface | silver |
| Contact resistance | ≤ 0.2 mΩ |
| Axial screw termination | |
| - Wire gauge ¹⁾ | 35 ... 120 mm ² |
| - AWG | 1 ... 0000 |
| - Stripping length | 19 ... 20 mm |
| - Max. cable diameter | 19.5 mm |

| | | | | | |
|-----------------|----|----|----|----|-----|
| mm ² | 35 | 50 | 70 | 95 | 120 |
| Nm | 8 | 10 | 12 | 14 | 16 |

- Tightening torque

Contacts Han® HC Modular 650

| | |
|--------------------------------|----------------------------|
| Material | copper alloy |
| Surface | silver |
| Contact resistance | ≤ 0.2 mΩ |
| Axial screw termination | |
| - Wire gauge ¹⁾ | 70 ... 185 mm ² |
| - MCM | 138 ... 350 |
| - Stripping length | 23 ... 25 mm |
| - Max. cable diameter | 26.5 mm |

| | | | | | |
|-----------------|----|----|-----|-----|-----|
| mm ² | 70 | 95 | 120 | 150 | 185 |
| Nm | 12 | 14 | 16 | 17 | 18 |

- Tightening torque

Frame

| | |
|---|-----------------|
| Tightening torque of the fixing screws | 2 Nm |
| Material | stainless steel |


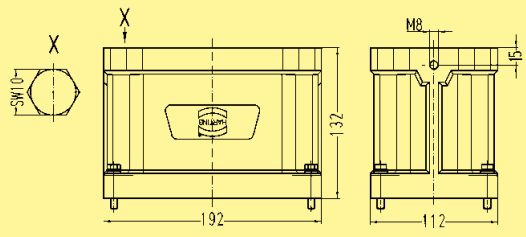

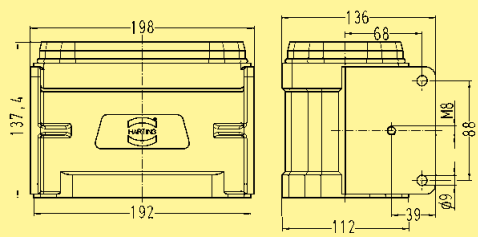

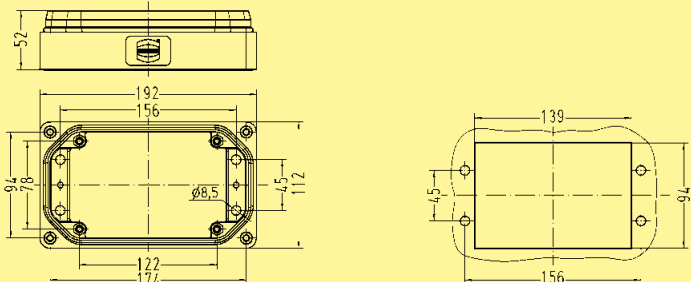

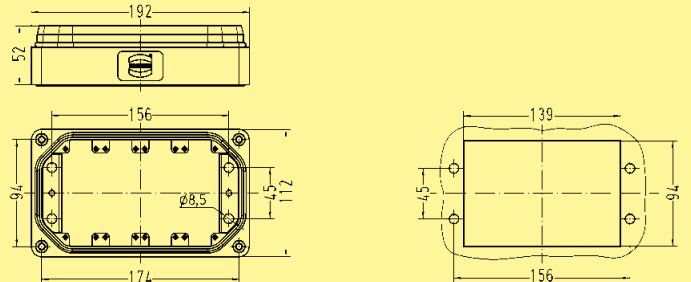


Technical characteristics

Han® HPR Hoods/Housings


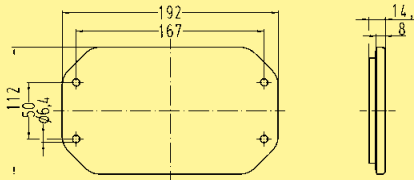


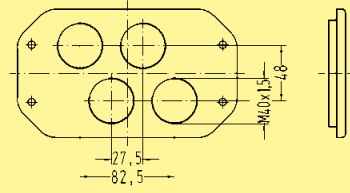











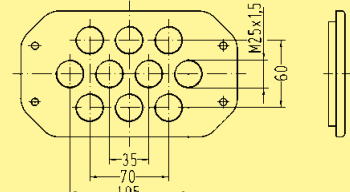

| | |
|--|---|
| Material | aluminium die-cast, corrosion resistant |
| Surface | |
| - Top coat | Epoxy powder paint RAL 9005 |
| Locking element | Stainless steel |
| Tightening torque | 4 Nm |
| Sealing | NBR |
| Limiting temperatures | -40 °C ... +125 °C |
| Degree of protection acc. to DIN EN 60 529 for coupled connector | IP 68 |

Han HC
Modular

¹⁾ geometric wire gauge
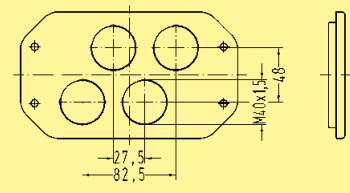
| Identification | Part number | Drawing | Dimensions in mm |
|--|-----------------------|--|------------------|
| <p>Hoods</p>  | <p>09 40 048 0451</p> |  | |
| <p>Housings, surface mounting</p>  | <p>09 40 048 0951</p> |  | |
| <p>Housings, bulkhead mounting</p>  | <p>09 40 048 0311</p> |  | |
| <p>Housings, bulkhead mounting for 4 inserts size 16 B</p>  | <p>09 40 048 0331</p> |  | |
| <p>Protection covers</p>  | <p>09 40 048 5401</p> |  | |

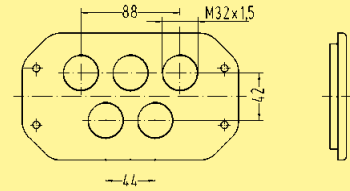Han HC Modular
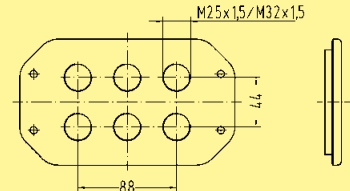
| Identification | Part number | M | Drawing | Dimensions in mm |
|---|---------------------------------------|---------|--|---|
| Cover* without cable entry  | 09 40 048 9801 (Distance bolt M 6) | - |  |  |
| | 09 40 048 9803 (Distance bolt M 5) | - | | |
| Cover* for male inserts  | 19 40 048 9801 (Distance bolt M 5) | 4 x 40 |  |  |
| Cover* for female inserts  | 19 40 048 9901 (Distance bolt M 5) | 4 x 40 |  |  |
| Cover*  | 19 40 048 9812 (Distance bolt M 6) | 5 x 32 |  |  |
| Cover*  | 19 40 048 9820 (Distance bolt M 6) | 6 x 25 |  |  |
| | 19 40 048 9822 (Distance bolt M 6) | 6 x 32 | | |
| Cover*  | 19 40 048 9860 (Distance bolt M 6) | 10 x 25 |  |  |

Han HC Modular

* Included in delivery range: 4 distance pieces, 4 screws M6, 4 washers

Stock items in bold type

| Identification | Part number | |
|--|-------------|---|
| | male | female |
| <p>Frame for 4 inserts size 16 B</p> <p>suitable for hoods and surface mounted housings in conjunction with cover 09 40 048 9803/ 19 40 048 9801/19 40 048 9901 only</p> | | <p>09 40 048 9912</p> <p>09 40 048 9912</p> |
| <p>Frame for 4 x HC 350 contacts + 2 x Han® Q 5/0</p> | | <p>09 40 048 9810</p> <p>09 40 048 9910</p> |
| <p>Frame for 4 x HC 650 contacts + 2 x Han® Q 5/0</p> | | <p>09 40 048 9811</p> <p>09 40 048 9911</p> |
| <p>Han HC Modular Frame for 6 x HC 350 contacts</p> | | <p>09 40 048 9806</p> <p>09 40 048 9906</p> |
| <p>Frame for 4 x HC 350 contacts + PE</p> | | <p>09 40 048 9809</p> <p>09 40 048 9909</p> |
| <p>Frame for 10 x HC 350 contacts</p> | | <p>09 40 048 9860</p> <p>09 40 048 9960</p> |

Stock items in bold type