

Directory


Page

<i>har-speed</i> M12	8
Technical characteristics	12
Assembly manual	14
<i>HARAX</i> ® M8-S	18
<i>HARAX</i> ® M12	23
<i>HARAX</i> ® M12-L, 3 poles, 4 poles, 5 poles	27
<i>HARAX</i> ® M12-L, shielded, A-coded	30
<i>HARAX</i> ® M12-L, shielded, Profibus	32
<i>HARAX</i> ® M12-L, shielded, Ethernet	38
Han® M12 Crimp	31 / 33 / 39
<i>HARAX</i> ® 7/8"	45
Han® 7/8"	46
Han® M12	24 / 28 / 49
<i>HARAX</i> ® Pg 9	54
<i>HARAX</i> ® Pg 13.5 / M20	56
List of part numbers	58
Company addresses	61

The innovative solution

With *har-speed* M12 HARTING bases the Ethernet network on a sustainable M12 foundation. The *har-speed* M12 differs significantly from today's M12 connectors for Ethernet because it is based on a 4-pair connector face with paired shielding. This allows *har-speed* M12 to be used for Ethernet transfer rates up to 10 Gigabit. The new HARTING *har-speed* M12 connector is, therefore, capable of complying with the high requirements of the transfer class E_A, respectively the Cat. 6_A. For the first time an M12 cabling system can be used for relevantly high data performance and permanent sustainability.

The *har-speed* M12 connectors can be optimally used for applications with bandwidths in machine and facility engineering, but also for the IP 67 infrastructure. The basis for the new development is the new PAS 61076-2-109 that defines a uniform connector face for 8-pole M12 connectors.

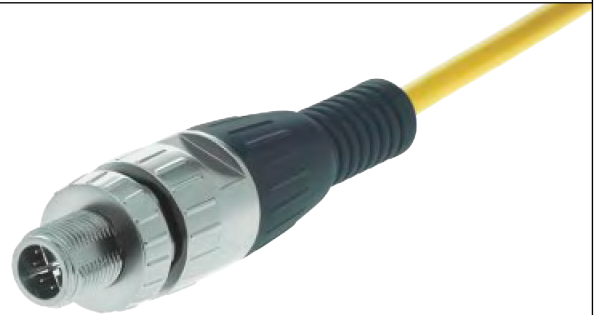

The new connector face complies with the following requirements:

- Maximum data rates through the configuration of the contacts in conformance with Ethernet technology.
- Minimal interaction and perfect shielding through paired shielding of the contacts.
- Fault proof connection through coding of the connector face. A connection error with other 8-pole M12's is impossible.

Overmolded versions in different lengths and a crimp connector for the local cabling are the first system components for a comprehensive cabling infrastructure solution by HARTING.

Technical Data

har-speed M12 connector

- Cabling with crimp technology
- Compact, robust design
- Fully shielded
- Transfer class E_A for 1 and 10 Gigabit Ethernet
- AWG 28 to AWG 24
- Temperature range -40 °C to 85 °C
- Protection class IP 65 / IP 67

har-speed M12 PCB receptacle

- Stable, industrial standard design
- Fully shielded
- Transfer class E_A for 1 and 10 Gigabit Ethernet
- Temperature range -40 °C to 70 °C
- Protection class IP 65 / IP 67



Identification	Part No.	Drawing	Dimensions in mm
har-speed M12 connector	21 03 881 5805		
har-speed M12 PCB receptacle har-speed M12 receptacle for front mounting straight, Cat. 6A straight, Cat. 5 angled, Cat. 6A	21 03 381 2801 21 03 381 2802 21 03 381 2803 21 03 381 4802		




Identification	Part No.	Drawing	Dimensions in mm
----------------	----------	---------	------------------

har-speed M12 receptacle for rear mounting


straight, Cat. 6A

21 03 381 2804

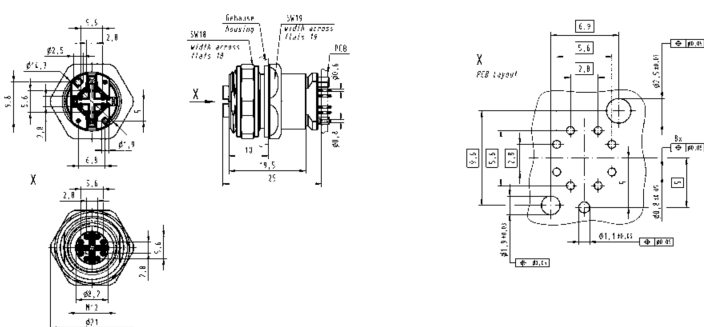


straight, Cat. 5

21 03 381 2805

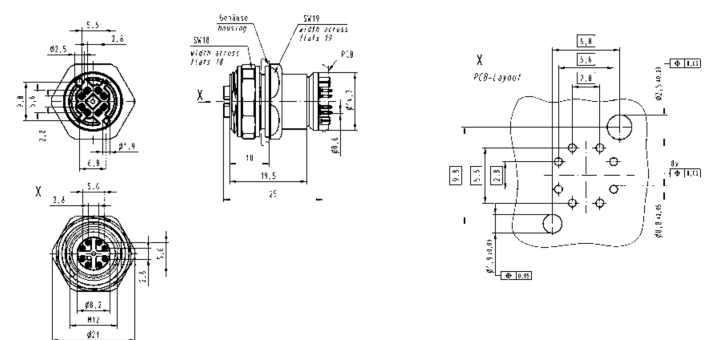

angled, Cat. 6A

21 03 381 4804

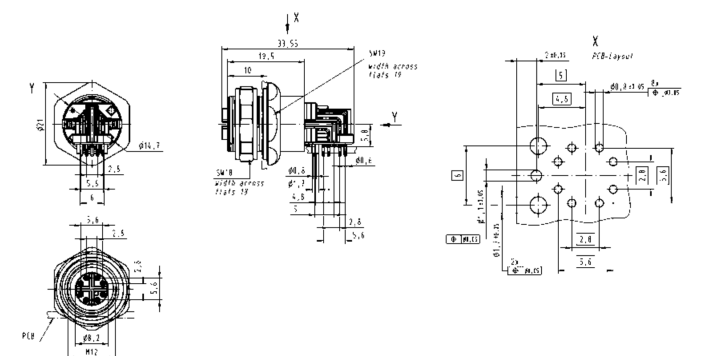





Identification	Part No.	Drawing	Dimensions in mm
----------------	----------	---------	------------------

**har-speed M12
system cable**


single ended overmoulded
system cable

Length:	1 m	21 03 483 1801
	3 m	21 03 483 1803
	5 m	21 03 483 1805
	7 m	21 03 483 1807
	10 m	21 03 483 1810

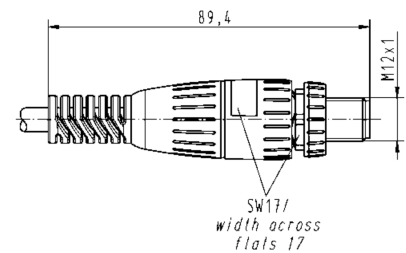

double ended overmoulded
system cable

Length:	0.5 m	21 03 483 5850
	1.0 m	21 03 483 5801
	1.5 m	21 03 483 5851
	2.0 m	21 03 483 5802
	2.5 m	21 03 483 5852

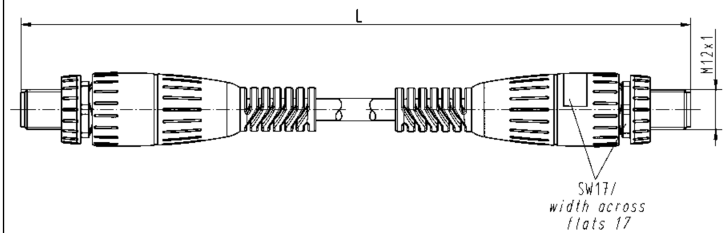

Technical characteristics

Specifications

IEC 60352-4
IEC 61076-2-101
IEC 61076-2-104

Approval




Construction type	HARAX® M8-XS	HARAX® M8-S/ M12-S	HARAX® M12 angled	HARAX® M12-L 3 poles, 4 poles	HARAX® M12-L 5 poles
Rated voltage	32 V	32 V	32 V	50 V	50 V
Rated current (see current carrying capacity)	2 A	4 A	4 A	6 A	4 A
Conductor cross section	0.1 - 0.14 mm ² AWG 27 - 26	0.14 - 0.34 mm ² AWG 26 - 22	0.25 - 0.5 mm ² AWG 24/7 - 20	0.34 - 0.75 mm ² AWG 22 - 18	0.25 - 0.34 mm ² AWG 24 - 22 0.34 - 0.5 mm ² AWG 22 - 20
Diameter of individual strands	≥ 0.05 mm	≥ 0.1 mm	≥ 0.1 mm	≥ 0.1 mm	≥ 0.1 mm
Conductor insulation material	PVC / PP / TPE	PVC / PP / TPE	PVC	PVC	PVC
Conductor diameter	0.6 - 1.0 mm	1.0 - 1.6 mm	1.2 - 1.6 mm	1.6 - 2.0 mm 2.0 - 2.6 mm	1.2 - 2.0 mm
Cable diameter	1.9 - 2.5 mm (transp.) 2.5 - 3.5 mm (grey)	M8-S: 2.5 - 5.1 mm M12-S: 2.9 - 4.0 mm (transp.) 4.0 - 5.1 mm (black)	4 - 5.1 mm	6 - 8 mm	4.7 - 6 mm 6 - 8 mm
Limiting temperatures	- 40 °C / + 85 °C	- 40 °C / + 85 °C	- 40 °C / + 85 °C	- 40 °C / + 85 °C	- 40 °C / + 85 °C
Temperature during connection	- 5 °C ... + 50 °C	- 5 °C ... + 50 °C	- 5 °C ... + 50 °C	- 5 °C ... + 50 °C	- 5 °C ... + 50 °C
Degree of protection	IP 67	IP 67	IP 67	IP 65 / IP 67	IP 65 / IP 67
Termination cycles with the same cross section	10	10	10	10	10
Recommended tightening torque / Hexagonal wrench	0.4 Nm / SW 9	M8-S: 0.4 Nm / SW 9 M12-S: 0.6 Nm / SW 13	0.6 Nm / SW 13	0.6 Nm / SW 17	0.6 Nm / SW 17


Current carrying capacity The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals. The current capacity-curve is valid for continuous, not interrupted current-loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.

Control and test procedures according to DIN IEC 60512-5.


M8-XS, 3 poles 1 = wire gauge 0.1 mm²
M8-S, 3 poles 2 = wire gauge 0.14 mm²

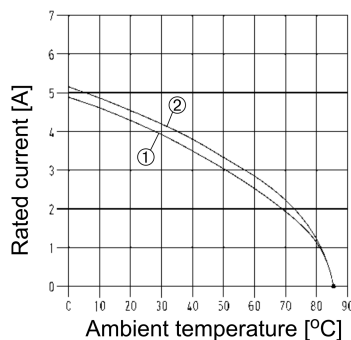


M8-S, 4 poles 1 = wire gauge 0.25 mm²
M12-S, 4 poles 2 = wire gauge 0.34 mm²



M12-L, 3 poles, 4 poles 1 = wire gauge 0.34 mm²
2 = wire gauge 0.75 mm²



M12, 4 poles, angled 1 = wire gauge 0.25 mm²
2 = wire gauge 0.5 mm²




Technical characteristics


Specifications IEC 60352-4 IEC 61076-2-101 IEC 61076-2-104 Approval

Construction type	HARAX® M12-XL 5 poles	HARAX® M12-L screened version, A-coded	HARAX® M12-L screened version PROFIBUS Ethernet		Han® M12 Crimp	HARAX® 7/8"
Rated voltage	50 V	50 V	32 V	50 V	50 V	230 V / 400 V
Rated current (see current carrying capacity)	4 A	4 A	4 A	4 A	4 A	10 A
Conductor cross section	0.5 - 1 mm ² AWG 20 - 16	0.14 - 0.34 mm ² AWG 26 - 22	0.25 - 0.34 mm ² AWG 24- 22	① 0.14 - 0.34 mm ² AWG 26 - 22 ② 0.34 - 0.5 mm ² AWG 22-20	0.34 - 0.5 mm ² AWG 22 - 20	0.75 - 1.5 mm ² AWG 18 - 16
Diameter of individual strands	≥ 0.1 mm	≥ 0.1 mm	≥ 0.1 mm	≥ 0.1 mm		≥ 0.15 mm
Conductor insulation material	PVC, ETFE	PVC	PVC, Zell-PE	PVC / PE		PVC, PP, TPE
Conductor diameter	1.6 - 2.0 mm	1.2 - 1.6 mm	2 - 2.6 mm	1.2 - 2.0 mm	2.0 - 2.3 mm	≤ 2.8 mm
Cable diameter	6 - 9 mm	4.5 - 8.8 mm	7.0 - 8.8 mm	4.5 - 8.8 mm	4 poles: 4.5 - 5.4 mm 7.0 - 8.8 mm 5 poles: 4.5 - 8.8 mm	6.8 - 9.5 mm (black) 9 - 12.5 mm (grey)
Limiting temperatures	- 40 °C / + 85 °C	- 40 °C / + 85 °C	- 40 °C / + 85 °C	- 40 °C / + 85 °C	- 40 °C / + 85 °C	- 40 °C / + 85 °C
Temperature during connection	- 5 °C ... + 50 °C	- 5 °C ... + 50 °C	- 5 °C ... + 50 °C	- 5 °C ... + 50 °C	- 5 °C ... + 50 °C	- 5 °C ... + 50 °C
Degree of protection	IP 65 / IP 67	IP 67	IP 67	IP 67	IP 67	IP 65 / IP 67
Termination cycles with the same cross section	10	10	10	10		10
Recommended tightening torque / Hexagonal wrench	0.6 Nm / SW 17	0.6 Nm / SW 17	0.6 Nm / SW 17	0.6 Nm / SW 17	0.5 Nm / SW 17	1.5 Nm / SW 22


7/8" 1 = wire gauge 0.75 mm² / 1.5 mm²

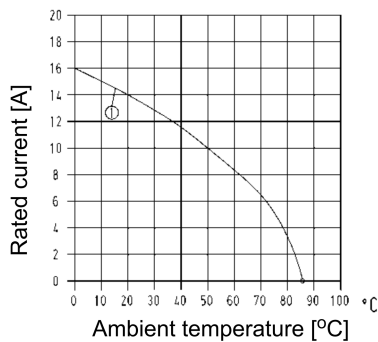


M12L, 5 poles 1 = wire gauge 0.25 mm²
2 = wire gauge 0.34 mm²

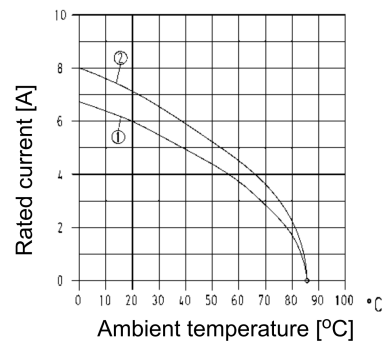


M12, Crimp 1 = wire gauge 0.34 mm² / 0.5 mm²

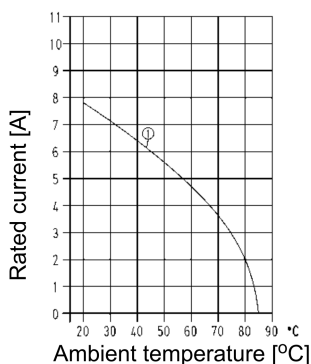

M12L, 5 poles 1 = wire gauge 0.34 mm²
2 = wire gauge 0.5 mm²

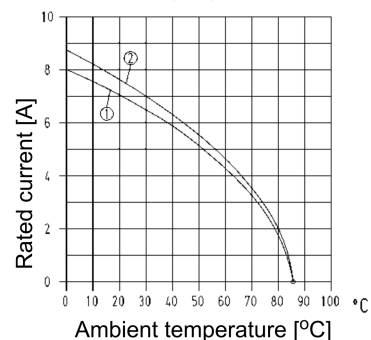

Assembly manual HARAX®, M8-XS, M8-S / M12-S, M12-L, M12-XL unshielded

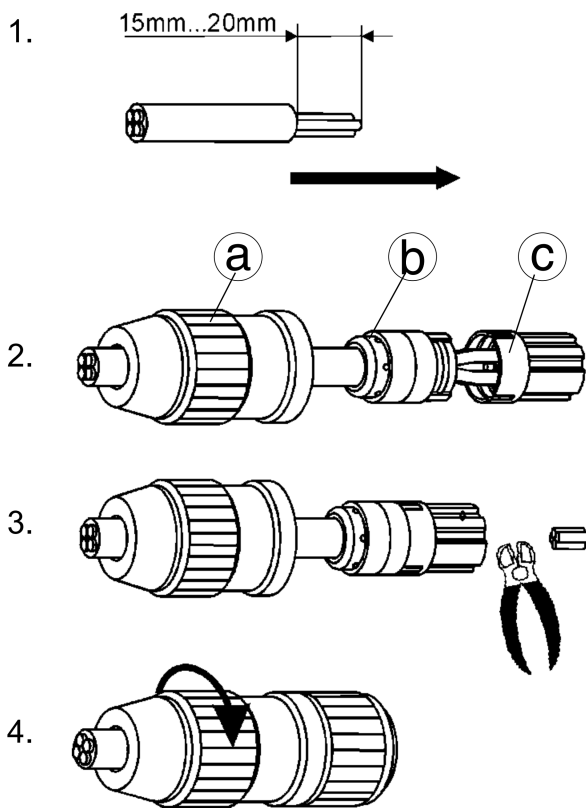

1. strip cable

2. assemble HARAX® elements

- Ⓐ Nut
- Ⓑ Strain relief
- Ⓒ Insert

3. cut off cable ends

Screw the nut onto the insert until a stop is noticeable.


4. screw the connector

Note!

For reconnection cut off the used cable ends and repeat steps 1 to 4.

The seal has to be replaced when worn.

Assembly manual HARAX®, M12-L shielded

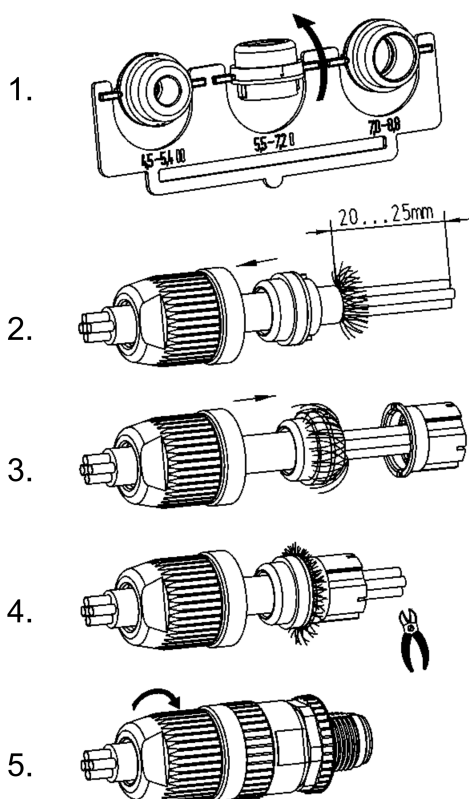

1. Choose the required seal.

2. Push nut and seal onto the cable.
Remove outer cable sleeve.

3. Slide seal under braid and form as shown.
Push wires through the contact splicing element.

4. Assemble seal and contact splicing element.
Cut off protruding shielding braid and cable ends.

5. Assemble connector.
Screw nut down to the limits.


Note!

For reconnection, cut off the used connector and repeat steps 2 to 5.

The seal has to be replaced when worn.


Assembly manual Han® M12 Crimp 4 poles

1.




1. Remove cable jacket and strip cores. Twist screening braid as shown and crimp contacts.

2.




2. Slide screw cap, ring and sealing onto the cable. Push screening braid into the sealing slot.

3.




3. Insert contacts into locator from the side. Fix contacts with the aid of assembly aid. Slide locator into connector, pay attention to the coding.

4.

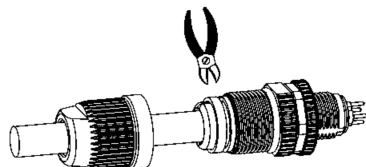

4. Sealing has to be flush with connector. Slide ring over the sealing and cut off screening braid.

5.



5. Tighten screw cap. Remove assembly aid.

The seal has to be replaced when worn.


Assembly manual Han® M12 Crimp 5 poles

1.




1. Break out the required seal.

2.




2. Push nut and seal onto the cable. Remove outer cable sleeve.

3.



3. Form braid as shown. Remove foils and cross cables if necessary. Finally strip cable ends and crimp contacts.

4.



4. Slide seal onto the cable until it stops and form as shown.

5.



5. Slide shielding ring over cable ends onto the braid and seal. Cut off excess shielding braid.

6.



6. Place middle contact in the contact element. Push contact elements together until it snaps.

7.



7. Place all other contacts into side cavities. Push preassembled unit of contact element, shielding ring and seal into the connector. Respect the coding!


8.



8. Assemble connector. Screw nut down until it stops.

Assembly manual *har-speed* M12

1.-3.



1. Attach locknut and seal.
2. Remove cable sheath.
3. Pull braid apart.

4.-7.



4. Attach shield element.
5. Remove pair shielding.
6. Remove wire insulation.
7. Crimp contacts.

8.



Option – Using covers for high performance.

8. Locating of contacts into insulator body, optionally usage of covers.

9.



9. Assembling of insulator body and housing.

10.




10. Remove excess braid.

11.



11. Tighten locknut.

Assembly manual HARAX® Pg 9 panel feed-through

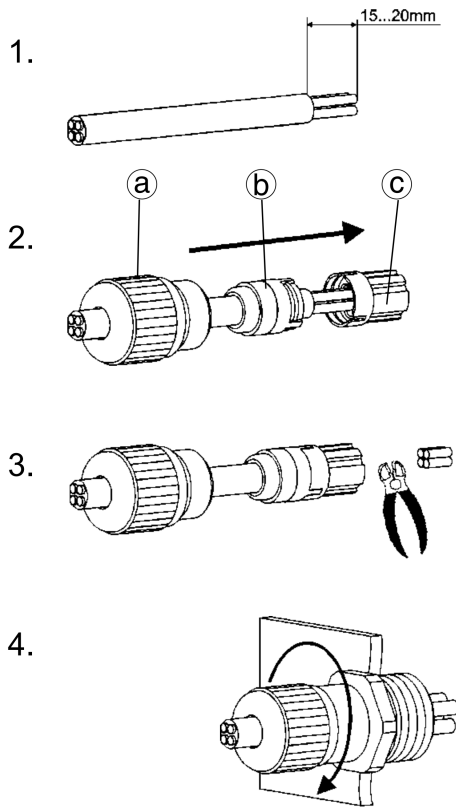

1. Strip cable jacket

2. Assemble HARAX® elements

- Ⓐ Nut
- Ⓑ Strain relief
- Ⓒ Insert

3. Cut off cable ends


4. Twist the nut onto the insert until a stop is noticeable

Note!

For reconnection cut off the used cable ends and repeat steps 1 to 4.

The seal has to be replaced when worn.

Assembly manual HARAX® Pg 13.5 / M20 panel feed-through

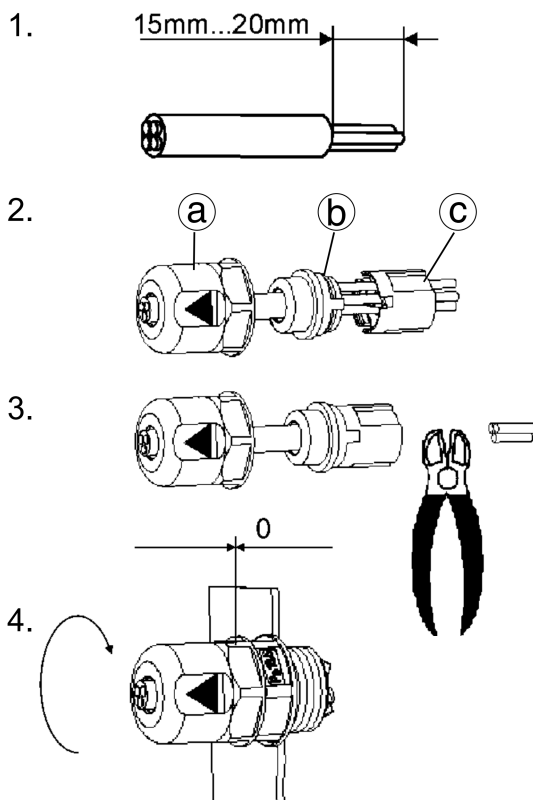

1. Connection and disconnection of the cable must only be performed by suitably qualified persons when supply is isolated.

2. HARAX® Pg 13.5 – 3 contacts – is supplied with either faston blades or solder terminals.

- Ⓐ Nut
- Ⓑ Strain relief
- Ⓒ Insert


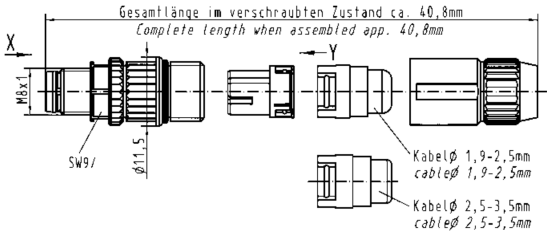

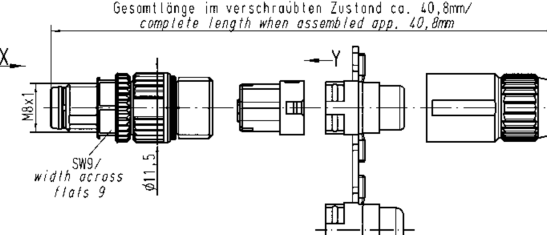

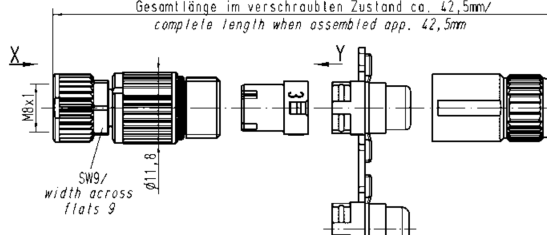

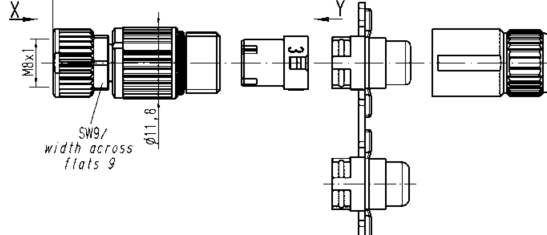

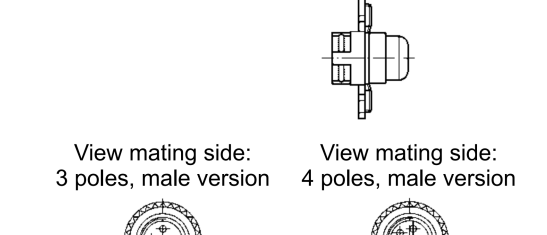


3. HARAX® Pg 13.5 / M20 – 4 contacts – is supplied only with solder termination.

4. The nut must be tightened completely down so that the notches engage on the contact carrier.

The opening of the gland always requires a wrench.

Note: For reconnection cut off the used cable ends and repeat steps 1 to 4.



Identification	Part No.		Drawing	Dimensions in mm
	Male	Female		
<p>HARAX® M8-XS</p> <p>straight version, 3 poles for 0,1 - 0,14 mm²</p> 	21 02 159 1305		 <p>Gesamtlänge im verschraubten Zustand ca. 40,8mm Complete length when assembled app. 40,8mm</p> <p>Kabel ϕ 1,9-2,5mm cable ϕ 1,9-2,5mm</p> <p>Kabel ϕ 2,5-3,5mm cable ϕ 2,5-3,5mm</p>	
<p>HARAX® M8-S</p> <p>straight version, 3 poles for 0,14 - 0,34 mm²</p> 	21 02 151 1305		 <p>Gesamtlänge im verschraubten Zustand ca. 40,8mm/ complete length when assembled app. 40,8mm</p> <p>SW9/ width across flats 9</p> <p>ϕ 11,5</p>	
<p>straight version, 4 poles for 0,14 - 0,34 mm²</p> 	21 02 151 1405		 <p>Gesamtlänge im verschraubten Zustand ca. 42,5mm/ complete length when assembled app. 42,5mm</p> <p>SW9/ width across flats 9</p> <p>ϕ 11,5</p>	
<p>straight version, 3 poles for 0,14 - 0,34 mm²</p> 		21 02 151 2305	 <p>SW9/ width across flats 9</p> <p>ϕ 11,5</p>	
<p>straight version, 4 poles for 0,14 - 0,34 mm²</p> 		21 02 151 2405	 <p>SW9/ width across flats 9</p> <p>ϕ 11,5</p>	<p>View mating side: 3 poles, male version</p>  <p>View mating side: 4 poles, male version</p> 



System cables with
Han® M8 Circular connector

Technical characteristics

Han® M8 Circular connector, without PE

Rated voltage	max. 60 V AC/DC
Rated current/contact	max. 4 A
Locking	Screw locking M8x1, self securing
Recommended torque	0.4 Nm
Temperature range (dependant on connected conductor)	-25 °C ... +85 °C
Degree of protection	IP 67
Number of wires / wire gauge	3 x 0.25 mm ²
Conductor insulation	PP (br, bl, sw)
Arrangement of insulated strands	32 x 0.1 mm
Sheath	PUR (UL, CSA)
Outer diameter	appr. 4.1 mm
Bending radius	10 x outer diameter
Temperature range (working and storage)	-5 °C ... + 80 °C




Identification	Part No.	Drawing	Dimensions in mm
----------------	----------	---------	------------------

Han® M8 Circular connector
Female angled, Male straight

Length: 0.3 m
0.6 m
1.0 m
1.5 m
2.0 m


21 02 454 5301
21 02 454 5302
21 02 454 5303
21 02 454 5304
21 02 454 5305

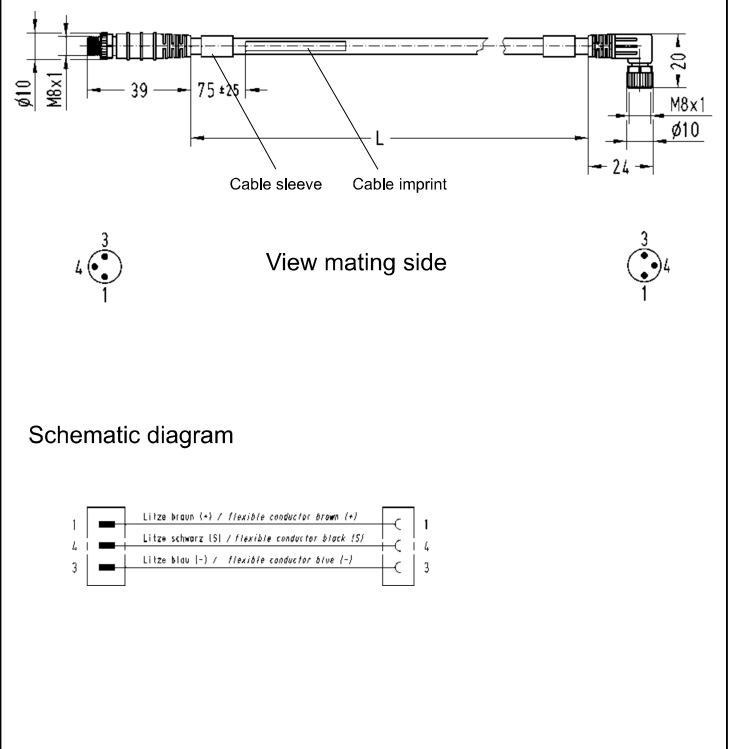

Han® M8 Circular connector
Female angled, with LED
Male straight


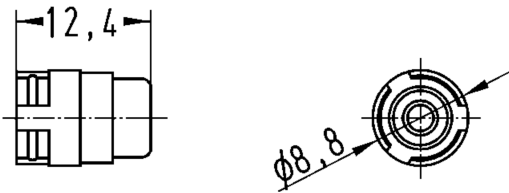

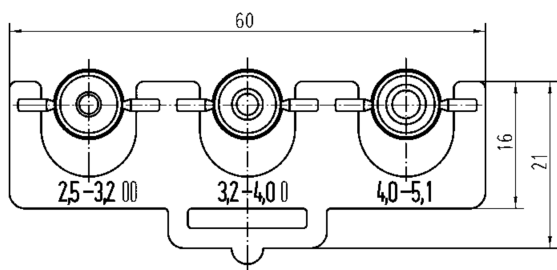

Length: 0.3 m
0.6 m
1.0 m
1.5 m
2.0 m

21 02 454 7301
21 02 454 7302
21 02 454 7303
21 02 454 7304
21 02 454 7305

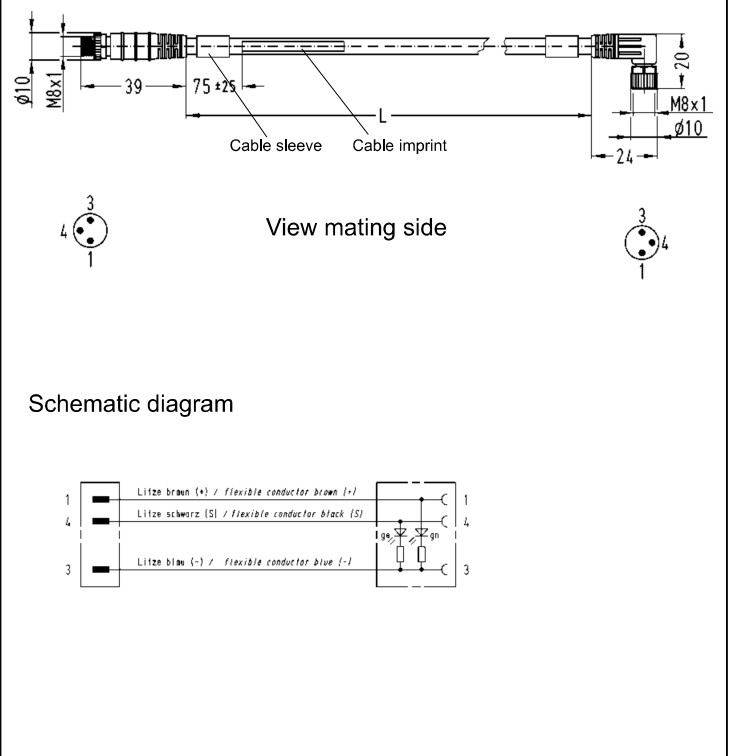











Identification	Part No.	Drawing	Dimensions in mm
<p>Han® M8 Circular connector Female angled pre-assembled on one end</p> <p>Length: 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m</p>	<p>21 02 554 4301 21 02 554 4302 21 02 554 4303 21 02 554 4304 21 02 554 4305</p>	<p>Schematic diagram</p> <p>View mating side</p>	
<p>Han® M8 Circular connector Female angled, with LED pre-assembled on one end</p> <p>Length: 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m</p>	<p>21 02 554 7301 21 02 554 7302 21 02 554 7303 21 02 554 7304 21 02 554 7305</p>	<p>Schematic diagram</p> <p>View mating side</p>	
<p>HARAX® M8 cable-Set without LED</p> <p>Delivery range: Han® M8 connector with individually adaptable cable and HARAX® M8-S</p> <p>Length: 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m</p>	<p>21 82 554 4301 21 82 554 4302 21 82 554 4303 21 82 554 4304 21 82 554 4305</p>	<p>Schematic diagram</p> <p>View mating side</p> <p>HARAX® M8-S (21 02 151 1305) ca. 40,8</p>	
<p>HARAX® M8 cable-Set with LED</p> <p>Delivery range: Han® M8 connector with individually adaptable cable and HARAX® M8-S</p> <p>Length: 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m</p>	<p>21 82 554 7301 21 82 554 7302 21 82 554 7303 21 82 554 7304 21 82 554 7305</p>	<p>Schematic diagram</p> <p>View mating side</p> <p>HARAX® M8-S (21 02 151 1305) ca. 40,8</p>	

Identification	Part No.	Drawing	Dimensions in mm
<p>Seal M8</p> <p>for 1.9 - 2.5 mm cable Ø for 2.5 - 3.5 mm cable Ø</p> 	<p>21 01 010 2016 21 01 010 2008</p>		
<p>Set of 3 seals for HARAX® M8-S</p> <p>for 2.5 - 3.2 mm cable Ø for 3.2 - 4.0 mm cable Ø for 4.0 - 5.1 mm cable Ø</p> 	<p>21 01 010 2013</p>		
<p>Han® M8 dynamometric screwdriver</p> <p>Tightening torque 0.4 Nm</p>	<p>SW 9</p> <p>09 99 000 0380</p>		

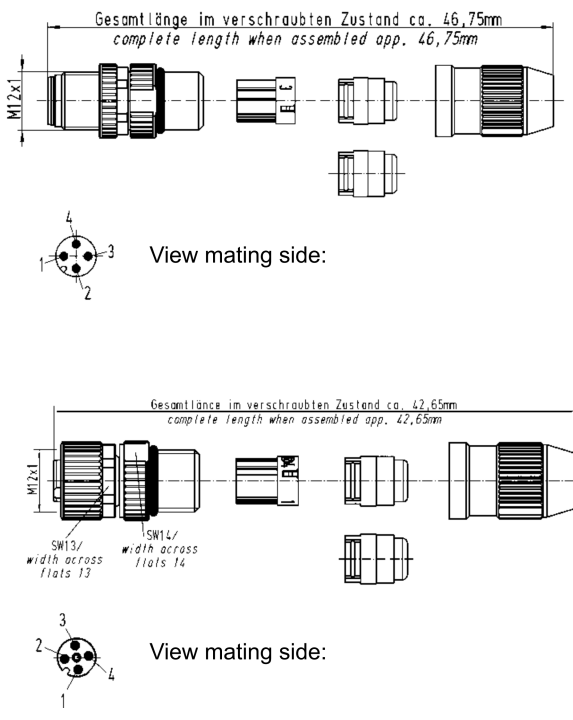

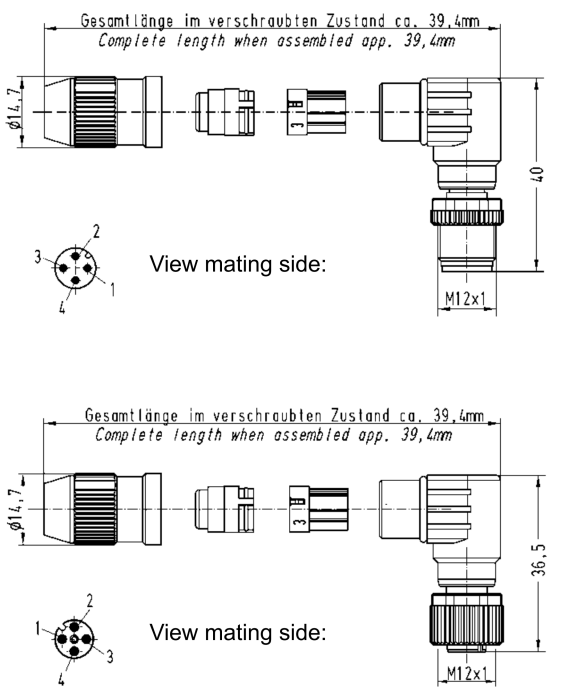Identification	Part No.		Drawing	Dimensions in mm
	Male	Female		
HARAX® M12-S straight version, 4 poles  	21 03 111 1405	21 03 111 2405		
HARAX® M12 angled version, 4 poles  angled version, 4 poles 	21 01 140 5081	21 01 140 5091		

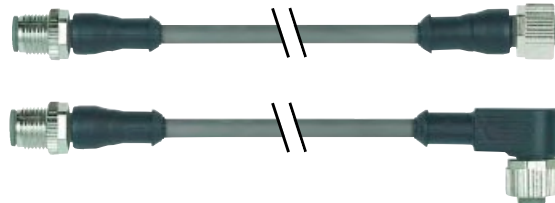

System cables with
Han® M12 Circular connector, A-coded

Technical characteristics

Han® M12 Circular connector, without PE

Rated voltage	max. 250 V AC/DC, max. 30 V DC (with LED)
Rated current/contact	max. 4 A
Locking	Screw locking M12x1, self securing
Recommended torque	0.6 Nm
Temperature range (dependant on connected conductor)	- 25 °C ... +85 °C
Degree of protection	IP 67
Number of wires / wire gauge	4 x 0.34 mm ²
Conductor insulation	PP (br, ws, bl, sw)
Arrangement of insulated strands	42 x 0.1 mm
Sheath	PUR (UL, CSA)
Outer diameter	appr. 4.7 mm
Bending radius	10 x outer diameter
Temperature range (working and storage)	-25 °C ... + 80 °C



Identification

Part No.


Drawing

Dimensions in mm


Han® M12 Circular connector
Female straight, Male straight

Length: 0.3 m
0.6 m
1.0 m
1.5 m
2.0 m

21 03 415 2401
21 03 415 2402
21 03 415 2403
21 03 415 2404
21 03 415 2405

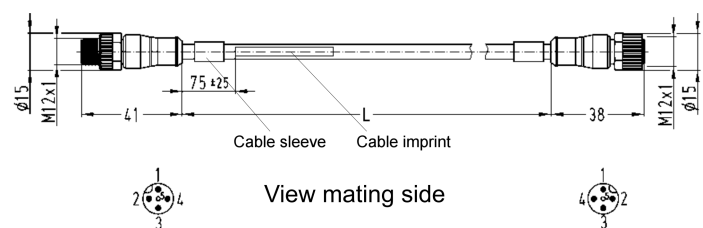


Schematic diagram




Han® M12 Circular connector
Female angled, Male straight

Length: 0.3 m
0.6 m
1.0 m
1.5 m
2.0 m

21 03 415 5401
21 03 415 5402
21 03 415 5403
21 03 415 5404
21 03 415 5405

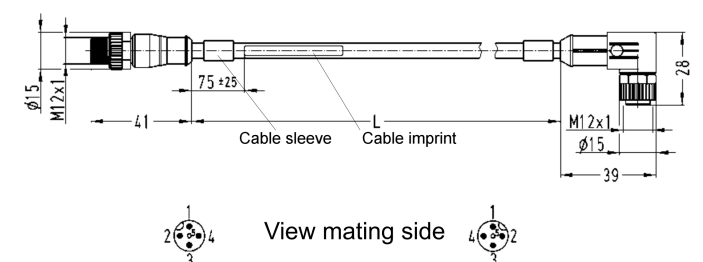


Schematic diagram




Han® M12 Circular connector
Female angled, with LED,
Male straight

Length: 0.3 m
0.6 m
1.0 m
1.5 m
2.0 m

21 03 415 7401
21 03 415 7402
21 03 415 7403
21 03 415 7404
21 03 415 7405

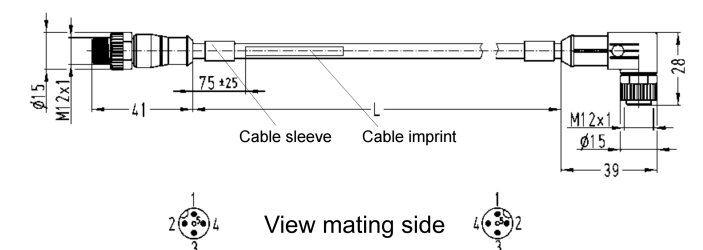



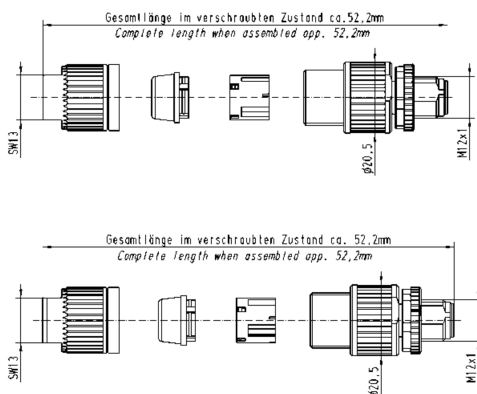

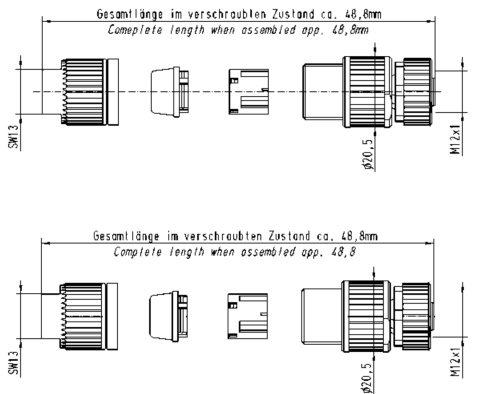

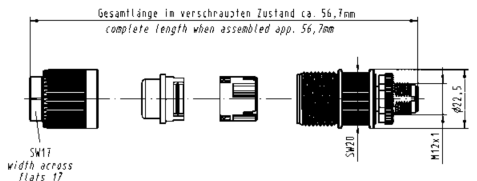
Schematic diagram





Identification	Part No.	Drawing	Dimensions in mm
<p>Han® M12 Circular connector Female angled pre-assembled on one end</p> <p>Length: 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m</p>	<p>21 03 515 4401 21 03 515 4402 21 03 515 4403 21 03 515 4404 21 03 515 4405</p>	<p>Schematic diagram</p> <ul style="list-style-type: none"> 1 — Litze braun (+) / flexible conductor brown (+) 2 — Litze weiss (0) / flexible conductor white (0) 4 — Litze schwarz (S) / flexible conductor black (S) 3 — Litze blau (-) / flexible conductor blue (-) <p>View mating side</p>	
<p>Han® M12 Circular connector Female angled, with LED pre-assembled on one end</p> <p>Length: 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m</p>	<p>21 03 515 7401 21 03 515 7402 21 03 515 7403 21 03 515 7404 21 03 515 7405</p>	<p>Schematic diagram</p> <ul style="list-style-type: none"> 1 — Litze braun (+) / flexible conductor brown (+) 2 — Litze weiss (0) / flexible conductor white (0) 4 — Litze schwarz (S) / flexible conductor black (S) 3 — Litze blau (-) / flexible conductor blue (-) <p>View mating side</p>	
<p>HARAX® M12 cable-Set without LED</p> <p>Delivery range: Han® M12 connector with individually adaptable cable and HARAX® M12-S</p> <p>Length: 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m</p>	<p>21 83 515 4401 21 83 515 4402 21 83 515 4403 21 83 515 4404 21 83 515 4405</p>	<p>View mating side</p> <p>HARAX® M12-S (21 03 111 1405)</p>	
<p>HARAX® M12 cable-Set with LED</p> <p>Delivery range: Han® M12 connector with individually adaptable cable and HARAX® M12-S</p> <p>Length: 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m</p>	<p>21 83 515 7401 21 83 515 7402 21 83 515 7403 21 83 515 7404 21 83 515 7405</p>	<p>View mating side</p> <p>HARAX® M12-S (21 03 111 1405)</p>	

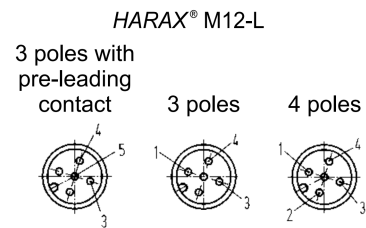
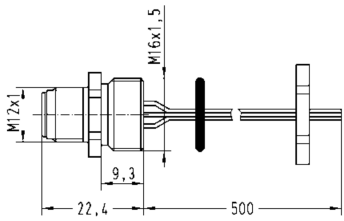


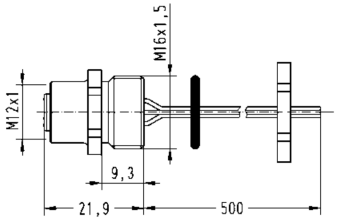





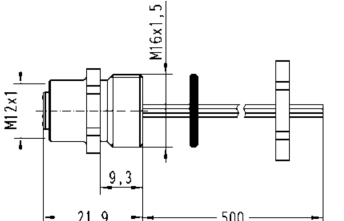






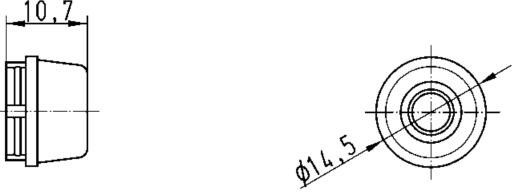



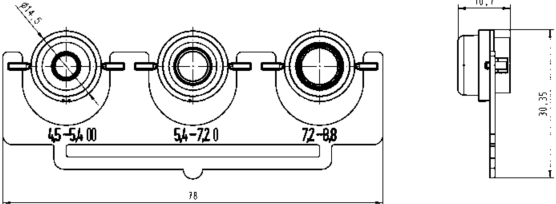

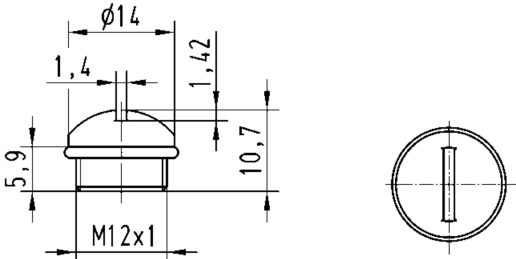

Identification	Part No.		Drawing	Dimensions in mm					
	Male	Female							
<p>HARAX® M12-L, unshielded</p> <p>3 poles, A-coded, with pre-leading contact (assignment 3, 4, 5)</p> <p>3 poles, A-coded (assignment 1, 3, 4)</p> <p>4 poles, A-coded (assignment 1, 2, 3, 4)</p> <p>4 poles, A-coded, to 2.6 mm core diameter (assignment 1, 2, 3, 4)</p> <p>0.34 - 0.75 mm² AWG 22 - 18</p> 	<p>21 03 212 1400</p> <p>21 03 212 1306</p> <p>21 03 212 1305</p> <p>21 03 212 1407</p>	<p>21 03 212 2400</p> <p>21 03 212 2306</p> <p>21 03 212 2305</p> <p>21 03 212 2407</p>							
					<p>3 poles, A-coded (assignment 3, 4, 5)</p> <p>3 poles, A-coded (assignment 1, 3, 4)</p> <p>4 poles, A-coded (assignment 1, 2, 3, 4)</p> <p>4 poles, A-coded, to 2.6 mm core diameter (assignment 1, 2, 3, 4)</p> <p>0.34 - 0.75 mm² AWG 22 - 18</p> 				
					<p>HARAX® M12-XL, unshielded</p> <p>5 poles, A-coded</p> <p>0.5 - 1 mm² AWG 20 - 18</p> <p>Cable diameter: 6 - 9 mm</p> 	<p>21 03 216 1505</p>	<p>21 03 216 2505</p>		



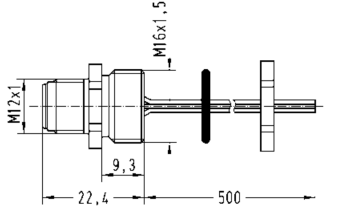



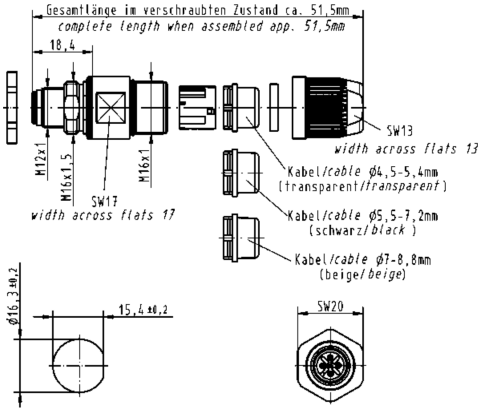

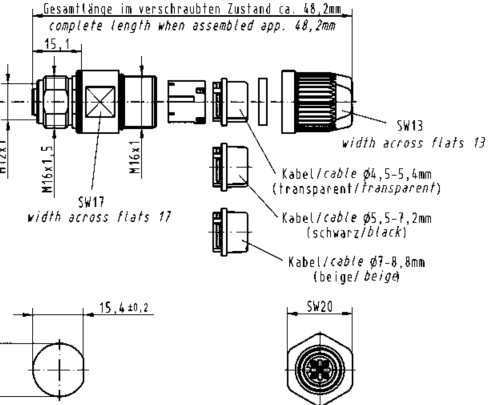
Technical characteristics: Han® M12 panel feed-through

Degree of protection	IP 67 when mated and locked	Termination	Crimp
Rated current	max. 4 A (each contact)	Contact material	Copper alloy
Rated voltage	50 V	Contact plating	Au over Ni
Mating cycles	max. 100	Housing material	Copper alloy
Limiting temperature	-25 °C ... +85 °C	Insulator material	PA

Identification	Part No.	Drawing	Dimensions in mm
 <p>Han® M12 panel feed-through Male, A-coded, 50 cm conductors, 0.5 mm²</p>	21 03 311 1402		
 <p>Han® M12 panel feed-through Female, A-coded, 50 cm conductors, 0.5 mm²</p>	21 03 311 2400		
 <p>Han® M12 panel feed-through Male, A-coded, 50 cm conductors, 0.5 mm², 5 poles</p>	21 03 311 1501		
 <p>Han® M12 panel feed-through Female, A-coded, 50 cm conductors, 0.5 mm², 5 poles</p>	21 03 311 2501		

Identification	Part No.	Drawing	Dimensions in mm
<p>Seal M12-S for 2.9 - 4.0 mm cable-Ø for 4 - 5.1 mm cable-Ø</p> 	<p>21 01 010 2011 21 01 010 2001</p>		
<p>Seal M12-L unshielded for 4.7 - 6 mm cable-Ø for 6 - 8 mm cable-Ø</p> 	<p>21 01 010 2015 21 01 010 2007</p>		
<p>Seal M12-XL unshielded</p> 	<p>21 01 010 2019</p>		
<p>Set of seals for M12-L shielded for 4.5 - 5.4 mm cable-Ø for 5.4 - 7.2 mm cable-Ø for 7.2 - 8.8 mm cable-Ø</p> 	<p>21 01 010 2017</p>		
<p>Cap M12</p> 	<p>21 01 000 0003</p>		
<p>Han® M12 dynamometric screwdriver Tightening torque 0.6 Nm</p>			
<p>for M12-S SW 13</p>	<p>09 99 000 0382</p>		
<p>for M12-L SW 17</p>	<p>09 99 000 0384</p>		

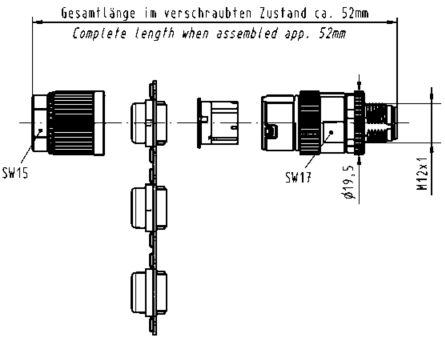

Identification	Part No.		Drawing	Dimensions in mm
	Male	Female		
<p>HARAX® M12-L, screened version</p> <p>4 poles, A-coded 0.14 - 0.34 mm² / AWG 26 - 22</p>  <p>4 poles, A-coded 0.14 - 0.34 mm² / AWG 26 - 22</p> 	21 03 221 1405	21 03 221 2405		
<p>HARAX® panel feed-through</p> <p>4 poles, A-coded 0.14 - 0.34 mm² / AWG 26 - 22</p> 	21 03 321 1425	21 03 321 2425		
<p>4 poles, A-coded 0.14 - 0.34 mm² / AWG 26 - 22</p> 				

Circular connector M12 shielded, A-coded acc. to IEC 61076-2-101



Identification	Part No.		Drawing	Dimensions in mm
	Male	Female		

Han® M12 Crimp

4 poles, A-coded

21 03 812 1405



4 poles, A-coded

21 03 812 2405



5 poles, A-coded

21 03 812 1505



5 poles, A-coded

21 03 812 2505



Han® M12 Crimp panel feed-through

4 poles, A-coded

21 03 822 1425



5 poles, A-coded

21 03 822 1525





4 poles, A-coded

21 03 822 2425




5 poles, A-coded

21 03 822 2525

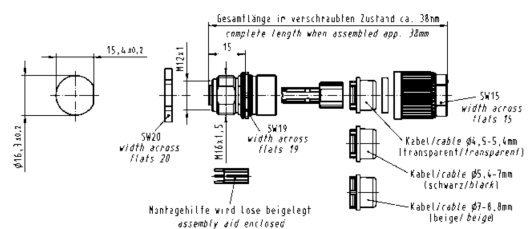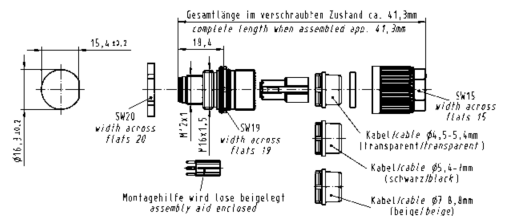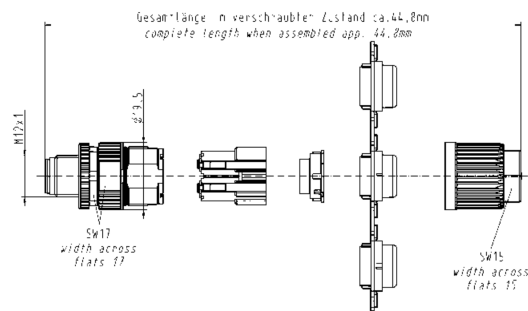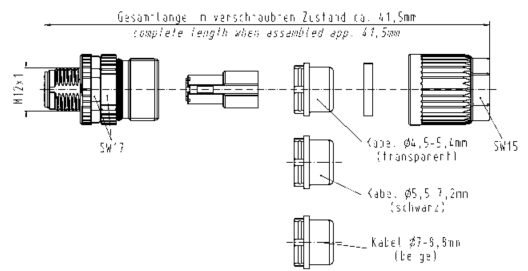

Circular connector M12 shielded, B-coded acc. to IEC 61076-2-101

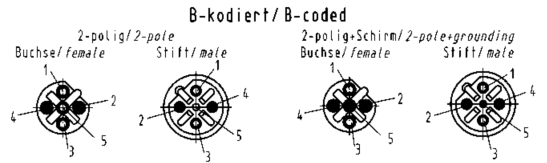


Identification	Part No.		Drawing	Dimensions in mm
	Male	Female		

HARAX® M12-L, screened version

2 poles, B-coded
2 poles and shield, B-coded
0.25 - 0.34 mm² / AWG 24 - 22




21 03 241 1301
21 03 241 1300

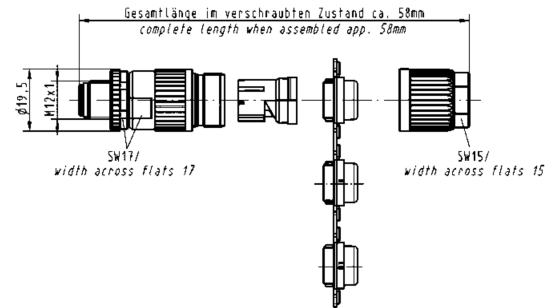

2 poles, B-coded
2 poles and shield, B-coded
0.25 - 0.34 mm² / AWG 24 - 22



21 03 241 2301
21 03 241 2300

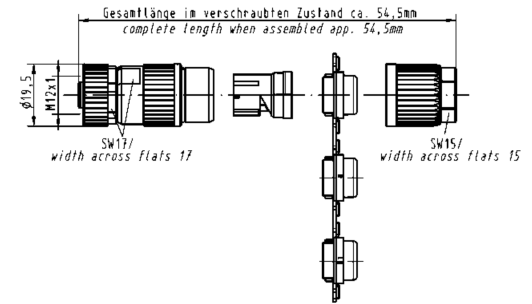


HARAX® panel feed-through

2 poles and shield, B-coded
0.25 - 0.34 mm² / AWG 24 - 22

7 - 8.8 mm



21 03 341 1425

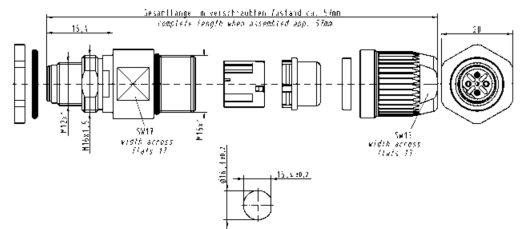


2 poles and shield, B-coded
0.25 - 0.34 mm² / AWG 24 - 22


7 - 8.8 mm



21 03 341 2425

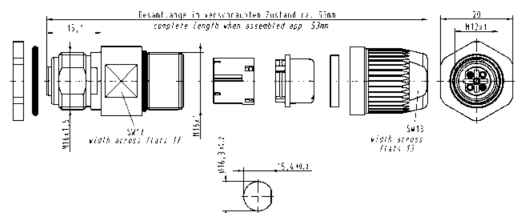

Circular connector M12 shielded, B-coded acc. to IEC 61076-2-101

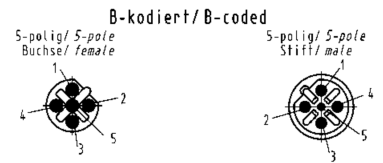

Identification Male Female Drawing Dimensions in mm

Han® M12 Crimp

5 poles, B-coded



21 03 841 1505

5 poles, B-coded



21 03 841 2505

Han® M12 Crimp panel feed-through

5 poles, B-coded




21 03 841 1525

5 poles, B-coded



21 03 841 2525

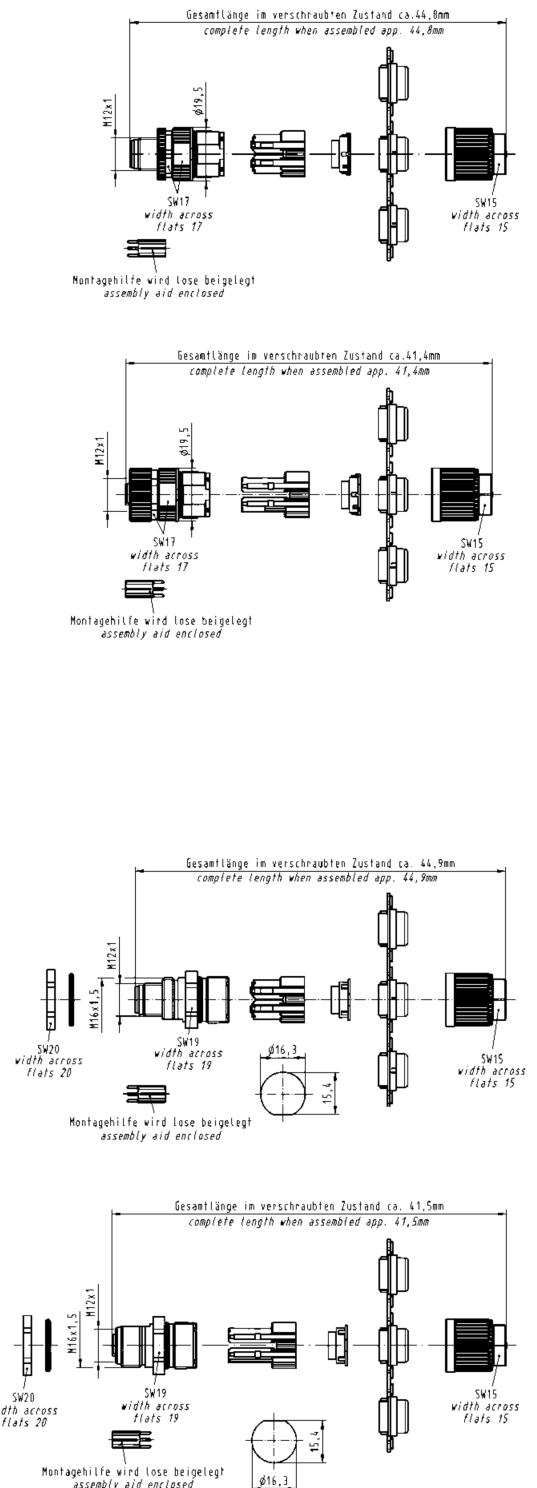



Technical characteristics

Rated voltage	max. 125 V AC/ DC
Rated current/contact	max. 4 A
Locking	Screw locking M12 x 1 mm, self securing
Recommended torque	0.6 Nm
Temperature range (male) °C	-25 °C ... +85 °C (dependant on connected conductor)
Degree of protection	IP 67
Number of wires / wire gauge	1 x 2 x diameter 0.64 mm
Conductor insulation	PUR (rt, gn)
Arrangement of insulated strands	19 x 0.13 mm
Sheath	PUR (UL/CSA)
Outer diameter	appr. 7.8 mm
Bending radius	65 x outer diameter
Temperature range °C (applicate with fixed cable)	-30 °C ... + 80 °C


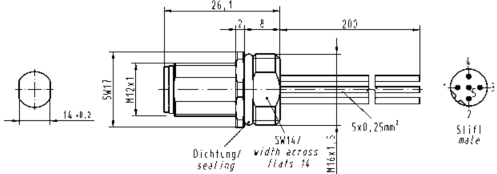

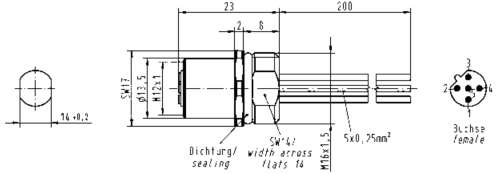

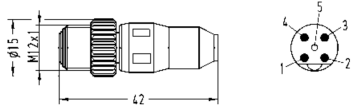

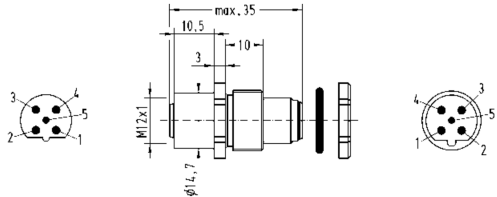
Identification	Part No.	Drawing
<p>Han® M12 Circular connector, Male, straight pre-assembled on one end, useable as trailing cable</p> <p>Length: 1.5 m 21 03 549 1301 3.0 m 21 03 549 1302 5.0 m 21 03 549 1303 7.5 m 21 03 549 1304 10.0 m 21 03 549 1305</p>		<p>Schematic diagram</p> <p>2 — green 4 — red</p> <p>shielding</p>
<p>Han® M12 Circular connector, Male, angled pre-assembled on one end, useable as trailing cable</p> <p>Length: 1.5 m 21 03 549 3301 3.0 m 21 03 549 3302 5.0 m 21 03 549 3303 7.5 m 21 03 549 3304 10.0 m 21 03 549 3305</p>		<p>Schematic diagram</p> <p>2 — green 4 — red</p> <p>shielding</p>



Identification	Part No.	Drawing
<p>Han® M12 Circular connector, Female, straight pre-assembled on one end, useable as trailing cable</p> <p>Length: 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m</p>	<p>21 03 549 2301 21 03 549 2302 21 03 549 2303 21 03 549 2304 21 03 549 2305</p>	<p>Schematic diagram</p>
<p>Han® M12 Circular connector, Female, angled pre-assembled on one end, useable as trailing cable</p> <p>Length: 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m</p>	<p>21 03 549 4301 21 03 549 4302 21 03 549 4303 21 03 549 4304 21 03 549 4305</p>	<p>Schematic diagram</p>
<p>Han® M12 Circular connector, Male, straight Female, straight pre-assembled on one end, useable as trailing cable</p> <p>Length: 0.3 m 0.6 m 1.0 m 1.5 m 2.0 m</p>	<p>21 03 449 4301 21 03 449 4302 21 03 449 4303 21 03 449 4304 21 03 449 4305</p>	<p>Schematic diagram</p>
<p>Han® M12 Circular connector, Male, angled Female, angled pre-assembled on one end, useable as trailing cable</p> <p>Length: 0.3 m 0.6 m 1.0 m 1.5 m 2.0 m</p>	<p>21 03 449 6301 21 03 449 6302 21 03 449 6303 21 03 449 6304 21 03 449 6305</p>	<p>Schematic diagram</p>

Technical characteristics: Han® M12 panel feed-through

Degree of protection	IP 67 in locked position
Rated current	max. 4 A (each contact)
Rated voltage	250 V AC/DC
Mating cycles	max. 100
Limiting temperatures	-25 °C ... +85 °C
Termination	solder, with pigtails (TPE insulation) assembled

Identification	Part No.		Drawing	Dimensions in mm
	Male	Female		
<p>Han® M12-panel feed-through</p> <p>Male, B-coded, 20 cm conductor, 0.25 mm²</p> 	21 03 339 1301			
<p>Han® M12-panel feed-through</p> <p>Female, B-coded, 20 cm conductor, 0.25 mm²</p> 		21 03 339 2301		
<p>Han® M12-male moving load</p> <p>B-coded</p> 	21 03 030 1300			
<p>Han® M12-male/female panel feed-through</p> <p>B-coded</p> 	21 03 330 1300		 <p>Rated voltage 24 V AC/DC</p> <p>Thread M16 x 1,5</p>	



Identification	Part No.		Drawing	Dimensions in mm
	Male	Female		

HARAX® M12-L, screened version

4 poles, D-coded,
0.14 - 0.34 mm², AWG 26-22
0.34 - 0.5 mm², AWG 22-20



21 03 281 1405
21 03 282 1405

4 poles, D-coded,
0.14 - 0.34 mm², AWG 26-22
0.34 - 0.5 mm², AWG 22-20



21 03 281 2405
21 03 282 2405

HARAX® panel feed-through

D-coded
0.14 - 0.34 mm², AWG 26 - 22

5.5 - 7.2 mm


21 03 381 1425



D-coded
0.14 - 0.34 mm², AWG 26 - 22

5.5 - 7.2 mm

21 03 381 2425

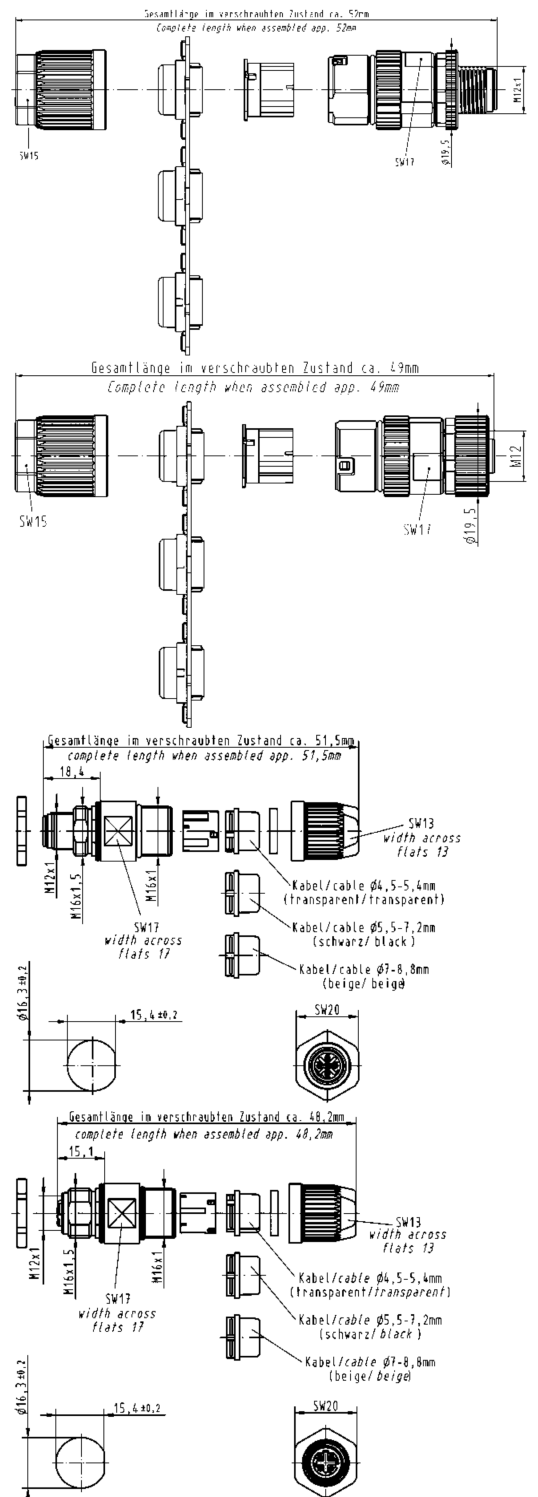

Circular connector M12 shielded, D-coded





Identification	Male	Part No.	Female	Drawing	Dimensions in mm
----------------	------	----------	--------	---------	------------------

Han® M12 Crimp
D-coded



21 03 882 1405


21 03 882 2405

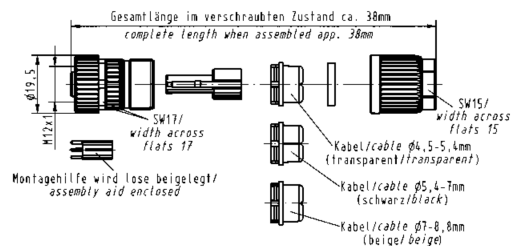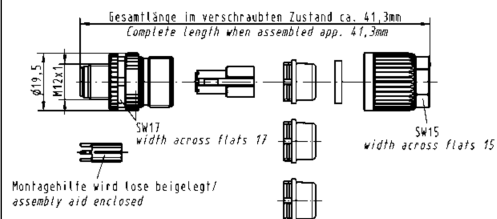

Han® M12 panel feed-through Crimp
D-coded




21 03 882 1425

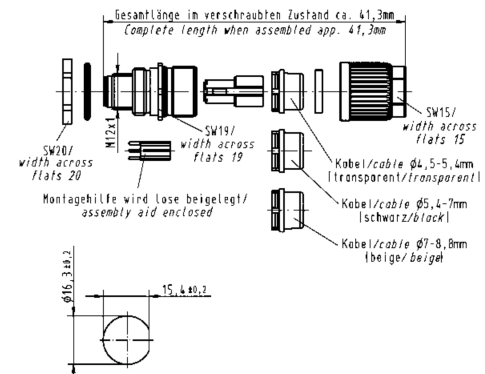


Han® M12 panel feed-through Crimp
D-coded



21 03 882 2425

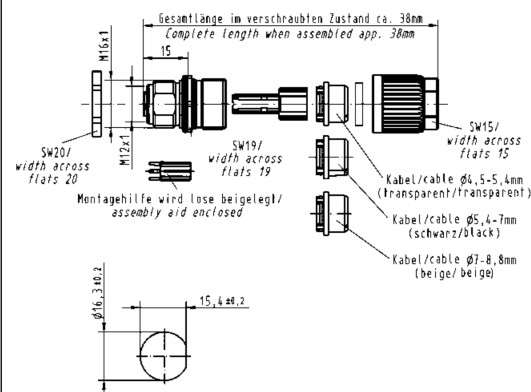

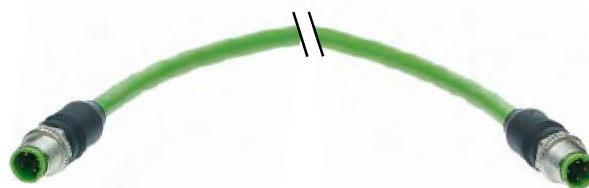

Technical characteristics

Pre-assembled and tested system cables

for structured cabling of industrial Ethernet networks, based on Han® M12 Circular connectors, D-coded

Cable type: Shielded Twisted Pair
Standard Cable

Mating interface: M12 D-coded
acc. to IEC 61 076-2-101

Transmission performance
acc. to ISO/IEC 11801:2002: Class D, 100% tested

Degree of protection IP 65 / IP 67 (when mated)

Pin assignment

Signal	Function	Conductor colour PROFINet®	Contact assignment
TD+	Transmission Data+	Yellow	1
TD-	Transmission Data-	Orange	3
RD+	Receiver Data+	White	2
RD-	Receiver Data-	Blue	4




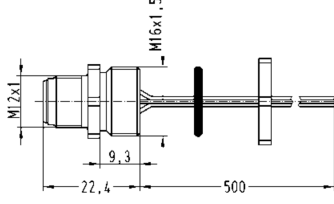








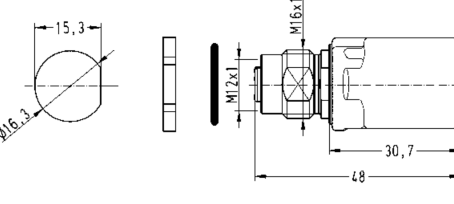


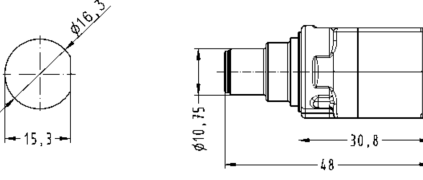


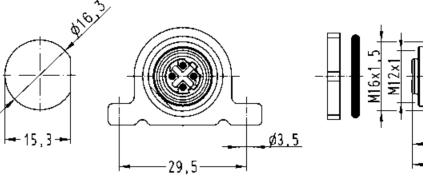

Identification	Part No.	Drawing	Dimensions in mm
<p>2 x Han® M12 Circular connector, D-coded, PUR, straight</p> <p>Length*: 1.0 m 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m 20.0 m</p>	<p>21 03 485 1401 21 03 485 1451 21 03 485 1403 21 03 485 1405 21 03 485 1457 21 03 485 1410 21 03 485 1420</p>	<p>cable: AWG 22 / 0.34 mm²</p>	
<p>1 x Han® M12 Circular connector, D-coded, PUR, straight</p> <p>Length*: 1.0 m 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m 20.0 m</p>	<p>21 03 585 1401 21 03 585 1451 21 03 585 1403 21 03 585 1405 21 03 585 1457 21 03 585 1410 21 03 585 1420</p>	<p>cable: AWG 22 / 0.34 mm²</p>	
<p>2 x Han® M12 Circular connector, D-coded, PUR, angled</p> <p>Length*: 1.0 m 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m 20.0 m</p>	<p>21 03 485 3401 21 03 485 3451 21 03 485 3403 21 03 485 3405 21 03 485 3457 21 03 485 3410 21 03 485 3420</p>	<p>cable: AWG 22 / 0.34 mm²</p>	
<p>1 x Han® M12 Circular connector, D-coded, PUR, angled</p> <p>Length*: 1.0 m 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m 20.0 m</p>	<p>21 03 585 3401 21 03 585 3451 21 03 585 3403 21 03 585 3405 21 03 585 3457 21 03 585 3410 21 03 585 3420</p>	<p>cable: AWG 22 / 0.34 mm²</p>	






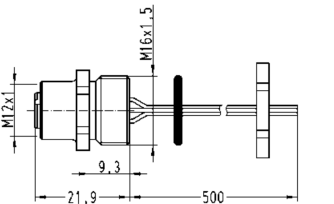



* other length on request

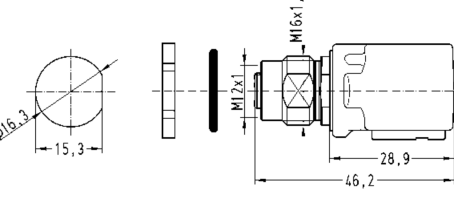

Identification	Part No.	Drawing	Dimensions in mm
<p>2 x Han® M12 Circular connector, D-coded, PVC, straight</p> <p>Length*: 1.0 m 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m 20.0 m</p>	<p>09 47 222 2002 09 47 222 2003 09 47 222 2005 09 47 222 2006 09 47 222 2022 09 47 222 2011 09 47 222 2013</p>	<p>cable: AWG 22 / 0.34 mm²</p>	
<p>1 x Han® M12 Circular connector, D-coded, PVC, straight</p> <p>Length*: 1.0 m 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m 20.0 m</p>	<p>09 47 220 0002 09 47 220 0003 09 47 220 0005 09 47 220 0006 09 47 220 0022 09 47 220 0011 09 47 220 0013</p>	<p>cable: AWG 22 / 0.34 mm²</p>	
<p>2 x Han® M12 Circular connector, D-coded, PVC, angled</p> <p>Length*: 1.0 m 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m 20.0 m</p>	<p>09 47 808 0002 09 47 808 0003 09 47 808 0005 09 47 808 0006 09 47 808 0022 09 47 808 0011 09 47 808 0013</p>	<p>cable: AWG 22 / 0.34 mm²</p>	
<p>1 x Han® M12 Circular connector, D-coded, PVC, angled</p> <p>Length*: 1.0 m 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m 20.0 m</p>	<p>09 47 800 0002 09 47 800 0003 09 47 800 0005 09 47 800 0006 09 47 800 0022 09 47 800 0011 09 47 800 0013</p>	<p>cable: AWG 22 / 0.34 mm²</p>	

RJ45 acc. to IEC 60603 – Technical characteristics see page 28

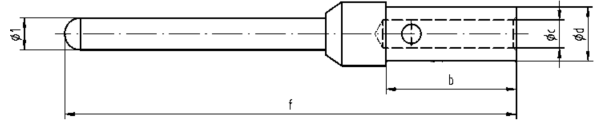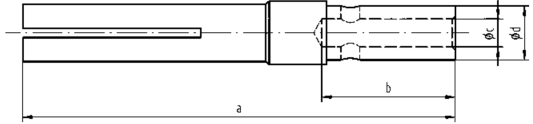Identification	Part No.	Drawing	Dimensions in mm
<p>Han® M12 panel feed-through Male, D-coded, 50 cm conductors, AWG 22, 4 poles</p> 	<p>21 03 371 1403</p>		
<p>Han® M12 panel feed-through Female, D-coded, 50 cm conductors, AWG 22, 4 poles</p> 	<p>21 03 371 2403</p>		
<p>Han® M12 female-RJ45 panel feed-through 4 poles, D-coded, angled</p> 	<p>21 03 381 4400</p>		
<p>Han® M12 female-RJ45 panel feed-through 4 poles, D-coded, straight</p> 	<p>21 03 381 2400</p>		
<p>Han® M12 male-RJ45 adapter 4 poles, D-coded, straight</p> 	<p>21 03 371 1420</p>		
<p>Han® M12 Gender Changer 4 poles, D-coded</p> 	<p>21 03 381 6405</p>		

Identification	Part No.	Technical characteristics																					
<p>Crimping tool for M12 Crimp and <i>har-speed</i> M12</p>	<p>09 99 000 0501</p>																						
<p>Accessories M12 Crimp</p> <p>Locator</p> <p>Single contacts (500 mating cycles)</p> <p>turned male contacts AWG 24-20 / 0.25-0.52 mm² AWG 26-22 / 0.13-0.33 mm²</p>  <p>turned female contacts AWG 24-20 / 0.25-0.52 mm² AWG 26-22 / 0.13-0.33 mm²</p> 	<p>09 99 000 0531</p> <p>09 67 000 8576 09 67 000 5576</p> <p>09 67 000 8476 09 67 000 5476</p>	  <table border="1" data-bbox="742 1108 1476 1198"> <thead> <tr> <th></th> <th>a</th> <th>b</th> <th>c</th> <th>d</th> <th>e</th> <th>f</th> </tr> </thead> <tbody> <tr> <td>AWG 26-22</td> <td>13.6</td> <td>4.2</td> <td>0.88</td> <td>1.7</td> <td>8.2</td> <td>14.2</td> </tr> <tr> <td>AWG 24-20</td> <td>13.6</td> <td>4.2</td> <td>1.13</td> <td>1.7</td> <td>8.2</td> <td>14.2</td> </tr> </tbody> </table> 		a	b	c	d	e	f	AWG 26-22	13.6	4.2	0.88	1.7	8.2	14.2	AWG 24-20	13.6	4.2	1.13	1.7	8.2	14.2
	a	b	c	d	e	f																	
AWG 26-22	13.6	4.2	0.88	1.7	8.2	14.2																	
AWG 24-20	13.6	4.2	1.13	1.7	8.2	14.2																	
<p>Accessories <i>har-speed</i> M12</p> <p>Locator</p> <p>Single contacts (500 mating cycles)</p> <p><i>har-speed</i> M12 contacts AWG 28-24 / 0.08-0.25 mm²</p> 	<p>09 99 000 0525</p> <p>21 01 100 9014</p>																						
<p>Accessories M12</p> <p>Locknut</p>	<p>21 01 000 0018</p>																						

HARAX® 7/8" Circular connector




Identification	Part No.		Drawing	Dimensions in mm
	Male	Female		

HARAX® 7/8" Male




21 04 116 1505

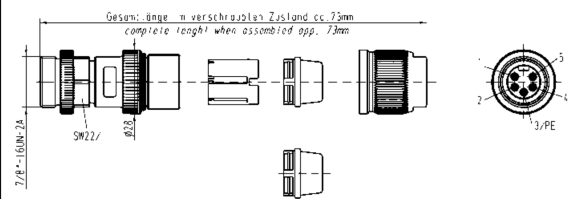


HARAX® 7/8" Female



21 04 116 2505

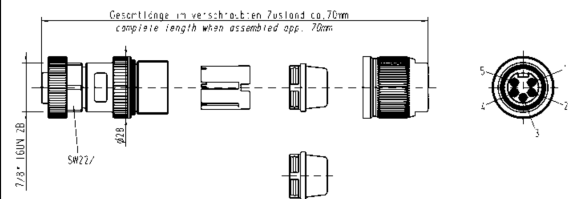

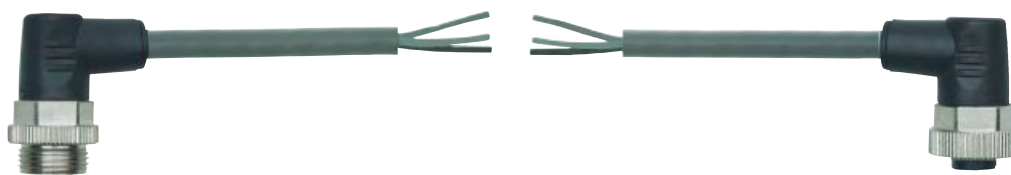

Overmolded cordsets 7/8"


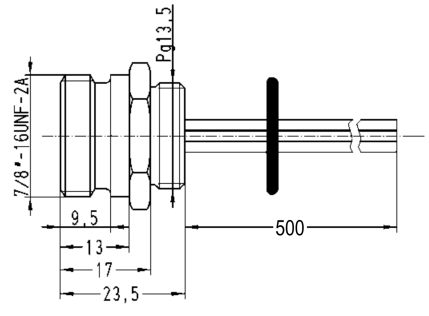


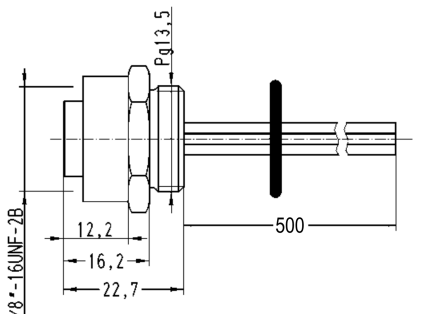


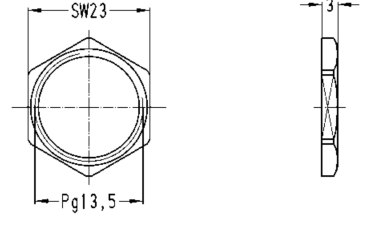

Technical characteristics

Degree of protection	IP 67
Temperature range	
applies to moved cable	-20 °C ... +80 °C
cables permanently installed	-50 °C ... +80 °C
Rated current	max. 8 A every contact (+40 °C)
Rated voltage	230 / 400 V
Rated impulse voltage	3 kV
Pollution degree	3
Material group	Category I acc. to IEC 60664-1
Cable data	
Jacket material	PUR
Jacket colour	grey
Wire isolation	TPM
Wire colours	brown, white, blue, black, green/yellow
Wire gauge	5 x 1.5 mm ²
Standards	UL / CSA



Overmolded cordsets 7/8"

Identification	Part No.	Drawing	Dimensions in mm
Overmolded cordsets 7/8" Female straight 5 pin Length: 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m	21 04 516 2501 21 04 516 2502 21 04 516 2503 21 04 516 2504 21 04 516 2505	<p>Schematic diagram</p> <p>View mating side</p>	
Overmolded cordsets 7/8" Female angled 5 pin Length: 1.5 m 3.0 m 5.0 m 7.5 m 10.0 m	21 04 516 4501 21 04 516 4502 21 04 516 4503 21 04 516 4504 21 04 516 4505	<p>Schematic diagram</p> <p>View mating side</p>	
Overmolded cordsets 7/8" Male-Female straight 5 pin Length: 0.3 m 0.6 m 1.0 m 1.5 m 2.0 m	21 04 416 1501 21 04 416 1502 21 04 416 1503 21 04 416 1504 21 04 416 1505	<p>Schematic diagram</p> <p>View mating side</p>	
Overmolded cordsets 7/8" Male-Female angled 5 pin Length: 0.3 m 0.6 m 1.0 m 1.5 m 2.0 m	21 04 416 3501 21 04 416 3502 21 04 416 3503 21 04 416 3504 21 04 416 3505	<p>Schematic diagram</p> <p>View mating side</p>	


Identification	Part No.	Drawing	Dimensions in mm
<p>Han® 7/8" panel feed-through 50 cm conductors, 0.75 mm², 5 poles</p> <p>Male</p> 	<p>21 04 316 1505</p>		
<p>Han® 7/8" panel feed-through 50 cm conductors, 0.75 mm², 5 poles</p> <p>Female</p> 	<p>21 04 316 2505</p>		
<p>Lock nut Pg 13.5 nickel plated</p> 	<p>21 01 000 0020</p>		
<p>Han® 7/8" dynamometric screwdriver Tightening torque 1.5 Nm</p> <p>for 7/8" SW 23</p>	<p>09 99 000 0395</p>		

Current carrying capacities


The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals. The current capacity-curve is valid for continuous, not interrupted current-loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.

Control and test procedures according to DIN IEC 60512-5.


M12, A-coding, straight, male, 4 poles
wire gauge 0.5 mm²

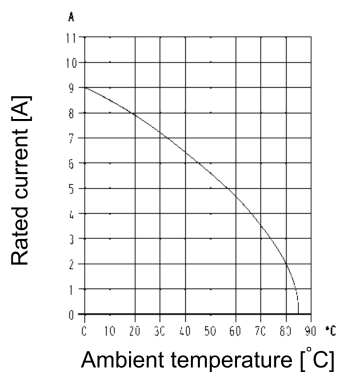


M12, A-coding, straight, female, 4 poles
wire gauge 0.75 mm²

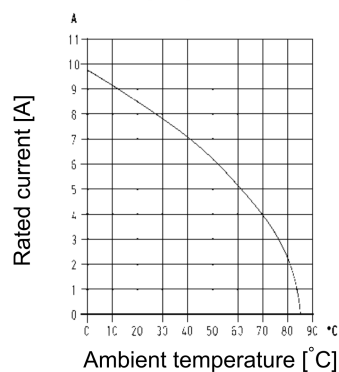


M12, A-coding, straight, female, 5 poles
wire gauge 0.5 mm²

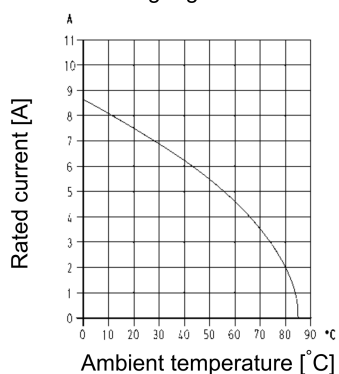


M12, A-coding, straight, male, 5 poles
wire gauge 0.5 mm²

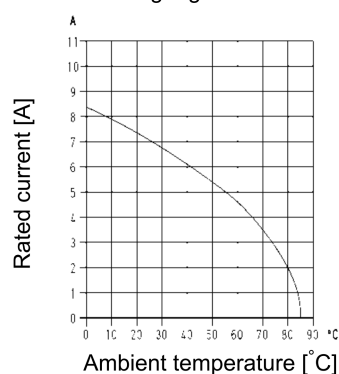

M12, D-coding, straight, female, 4 poles
wire gauge 0.5 mm²

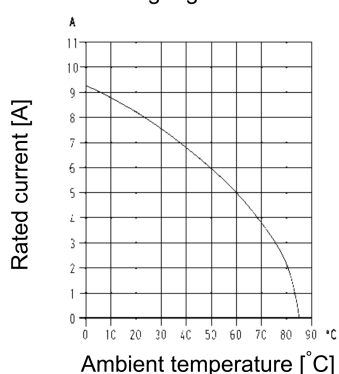

M12, D-coding, angled, female, 4 poles
wire gauge AWG 22

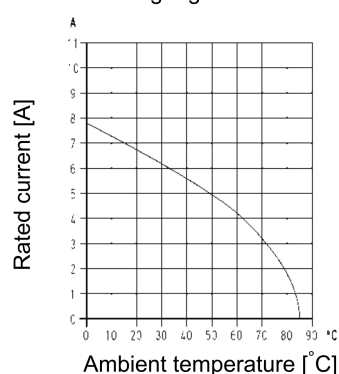

Technical characteristics: Han® M12 pcb

Degree of protection	IP 20, IP 67 (mated and locked)	Temperature during connection	-5 °C ... +50 °C
Rated current	max. 4 A (dependant on pcb layout)	Termination	PIH
Rated voltage	50 V	Contact material	Copper alloy
Mating cycles	max. 500	Contact plating (mating side)	Au over Ni
Limiting temperature	-25 °C ... +85 °C	Insulator material	PA



Identification	Part No.	Drawing	Dimensions in mm
----------------	----------	---------	------------------

Han® M12
Male, A-coded,
straight





4 poles, IP 20
4 poles, IP 67

21 03 321 1410
21 03 321 1420

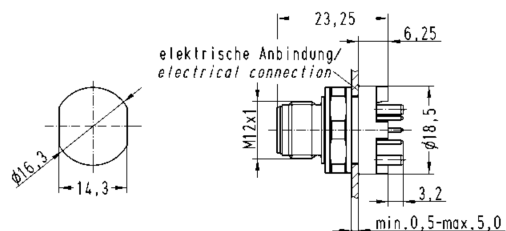

5 poles, IP 20
5 poles, IP 67

21 03 321 1510
21 03 321 1520

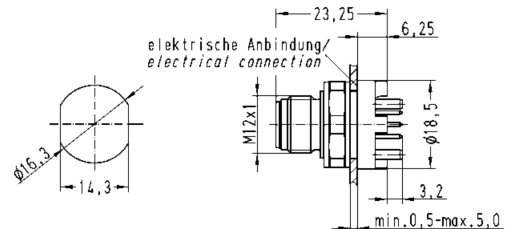



Han® M12
Female, A-coded,
straight





4 poles, IP 20
4 poles, IP 67

21 03 321 6410
21 03 321 6420

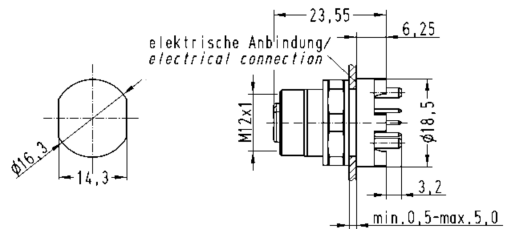

5 poles, IP 20
5 poles, IP 67

21 03 321 6510
21 03 321 6520

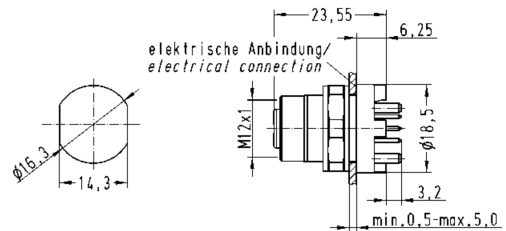



Identification

Part No.

Drawing

Dimensions in mm



Han® M12

Male, B-coded,
straight



5 poles, IP 67

21 03 341 1505

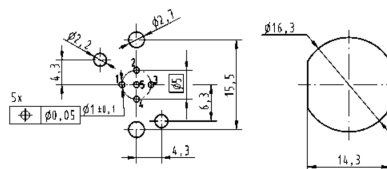



Han® M12

Female, B-coded,
straight



5 poles, IP 67

21 03 341 2505

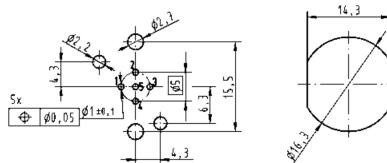



Identification

Part No.

Drawing

Dimensions in mm


Han® M12

Male, D-coded,
straight, 4 poles



IP 67

21 03 371 1400

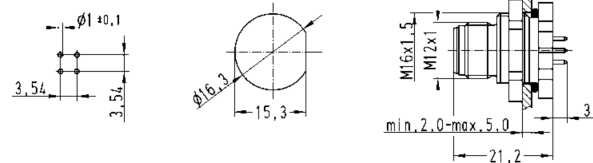


Han® M12

Female, D-coded,
straight, 4 poles



IP 67

21 03 371 2415

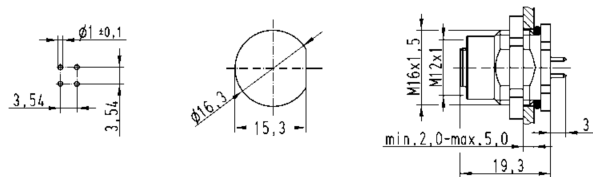


IP 20

21 03 381 6410

IP 67

21 03 381 6420

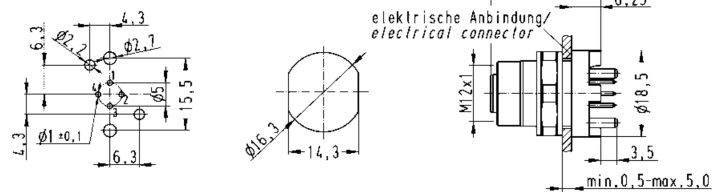

Technical characteristics: Han® M12 pcb D-coded angled

Degree of protection	IP 20, IP 67 (mated and locked)	Temperature during connection	-5 °C ... +50 °C
Rated current	max. 4 A (dependant on pcb layout)	Termination	Reflow
Rated voltage	50 V	Contact material	Copper alloy
Mating cycles	max. 500	Contact plating (mating side)	Au over Ni
Limiting temperature	-25 °C ... +85 °C	Insulator material	LCP

Identification	Part No.	Drawing	Dimensions in mm
----------------	----------	---------	------------------

Han® M12

Female, D-coded,
angled, 4 poles
without fixing hole

IP 20
IP 67


21 03 381 4410
21 03 381 4430



with fixing hole

IP 20
IP 67

21 03 381 4412
21 03 381 4432

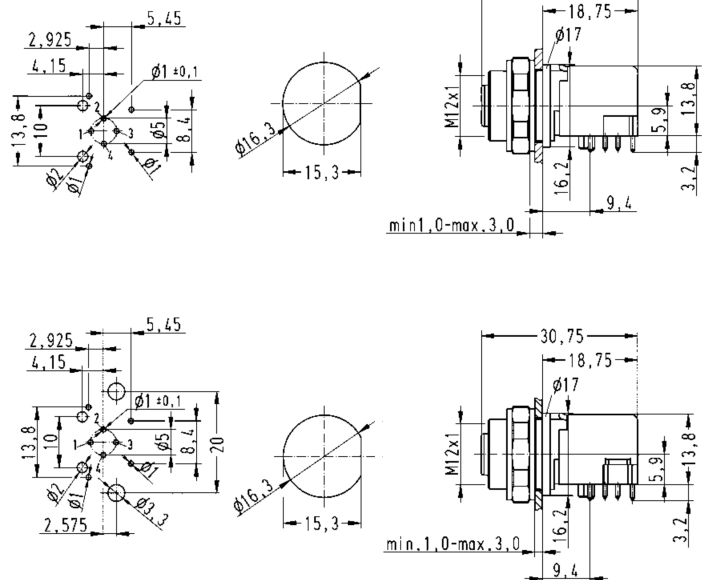


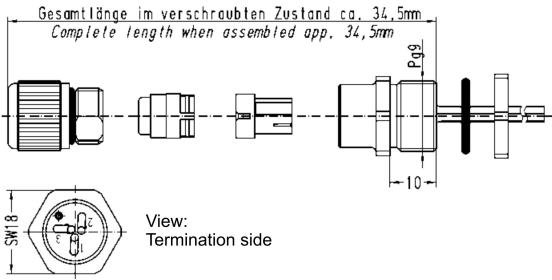

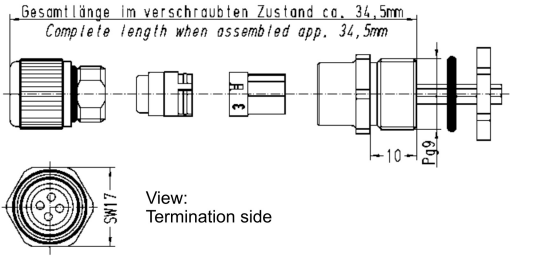

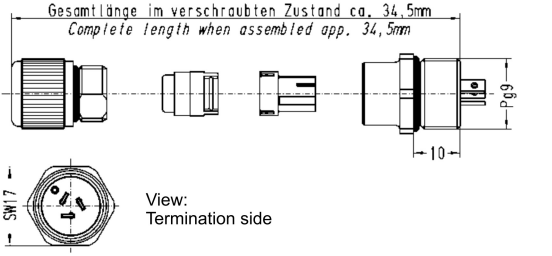
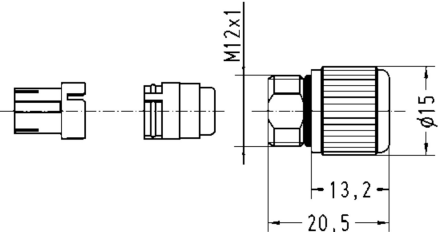
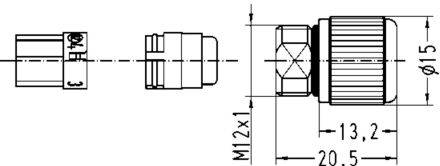


Technical characteristics: HARAX® Pg 9 panel feed-through

Rated voltage	32 V
Rated current	4 A
Wire gauge	0.25 - 0.5 mm ² / 24/7 AWG - 22 AWG
Diameter of individual strands	≥ 0.1 mm
Conductor insulation material	PVC
Conductor diameter	1.2 - 1.6 mm
Cable diameter	4.0 - 5.1 mm
Working temperature	- 25 °C ... + 85 °C
Temperature during connection	- 5 °C ... + 50 °C
Degree of protection	IP 67
Termination cycles with the same cross section	10

HARAX® Pg 9 panel feed-through



Identification	Part No.	Drawing	Dimensions in mm
<p>HARAX® Pg 9 panel feed-through 3 contacts, with pre-assembled 0.5 m / 0.5 mm² pigtail cable</p> 	21 01 130 4241	 <p>Gesamtlänge im verschraubten Zustand ca. 34,5mm Complete length when assembled app. 34,5mm</p> <p>View: Termination side</p>	
<p>HARAX® Pg 9 panel feed-through 4 contacts, with pre-assembled 0.5 m / 0.5 mm² pigtail cable</p> 	21 01 140 4341	 <p>Gesamtlänge im verschraubten Zustand ca. 34,5mm Complete length when assembled app. 34,5mm</p> <p>View: Termination side</p>	
<p>HARAX® Pg 9 panel feed-through 3 contacts with faston blades</p> 	21 01 130 4011	 <p>Gesamtlänge im verschraubten Zustand ca. 34,5mm Complete length when assembled app. 34,5mm</p> <p>View: Termination side</p>	
<p>Termination element M12 HARAX® 3 contacts Screw cap, splice ring, seal</p>	21 01 010 0001	 <p>M12x1</p> <p>13,2</p> <p>20,5</p> <p>∅15</p>	
<p>Termination element M12 HARAX® 4 contacts Screw cap, splice ring, seal</p>	21 01 010 0006	 <p>M12x1</p> <p>13,2</p> <p>20,5</p> <p>∅15</p>	

Technical characteristics

Specifications	IEC 60352-4 DIN 61984	
Approval	, VDE	
Construction type	Pg 13,5 3 poles	Pg 13,5 / M20 4 poles
Working voltage	250 V 4 kV 3 with faston terminals with insulation cap	230/400 V 4 kV 3
acc. to UL/CSA	600 V	600 V
Working current (see current carrying capacity)	16 A	16 A
Testing voltage	4 kV (1.2/50)	4 kV (1.2/50)
Conductor cross section	0.75 - 1.5 mm ²	0.75 - 1.5 mm ²
Diameter of individual strands	≥ 0.2 mm	≥ 0.2 mm
Outer cable diameter	6.0 - 9.0 mm	6.0 - 9.0 mm
Termination cycles with the same cross section	10	10
Limiting temperature	- 25 / + 85 °C	- 25 / + 85 °C
Temperature during connection	- 5 ... + 50 °C	- 5 ... + 50 °C
Degree of protection	IP 67	IP 67
Conductor insulation material	PVC	PVC
Max. tightening torque	8 Nm	8 Nm

Current carrying capacity


The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals. The current capacity-curve is valid for continuous, not interrupted current-loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.

Control and test procedures according to DIN IEC 60512-3.

Pg 13,5 3 contacts

1 = wire gauge
0.75 mm²


2 = wire gauge
1.5 mm²

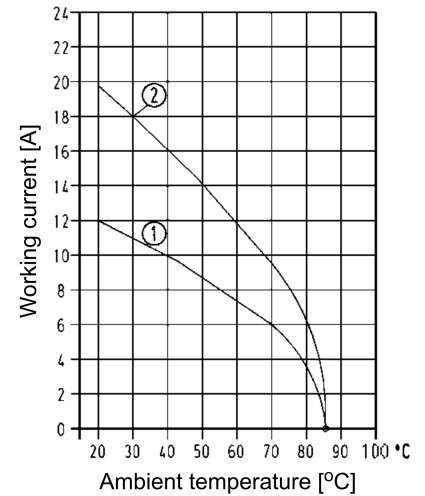


Pg 13,5 / M20 4 contacts

1 = wire gauge
0.75 mm²

2 = wire gauge
1.5 mm²

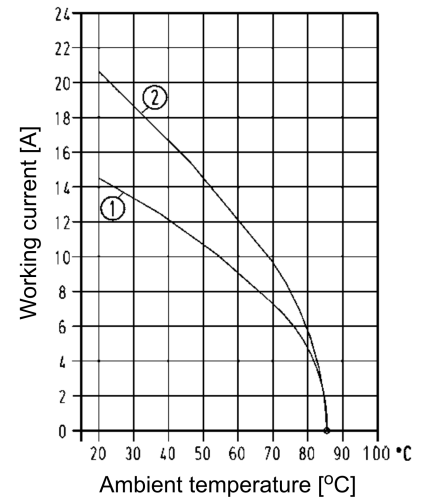

HARAX® Pg 13.5 / M20 panel feed-through

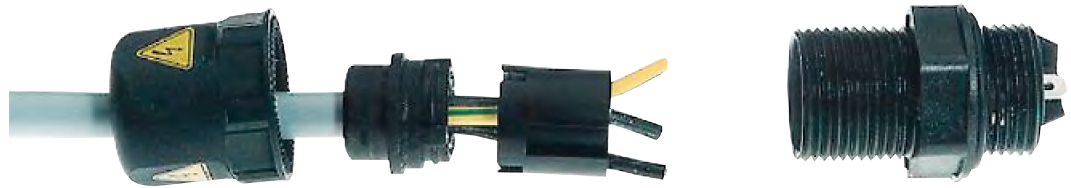

Identification	Part No.	Drawing	Dimensions in mm
HARAX® Pg 13.5 / 3 contacts with faston blades	21 01 130 1013		
HARAX® Pg 13.5 / 3 contacts with solder termination	21 01 130 1023		
HARAX® Pg 13.5 / 3 contacts with pre-assembled pigtail cable, l = 500 mm, 1.5 mm ²	21 01 130 1223		
HARAX® Pg 13.5 / 2 + PE with faston blades	21 01 130 3013		
HARAX® Pg 13.5 / 2 + PE with solder termination	21 01 130 3023		
HARAX® Pg 13.5 / 2 + PE with pre-assembled pigtail cable, l = 500 mm, 1.5 mm ²	21 01 130 3233		
HARAX® Pg 13.5 / 4 contacts with solder termination	21 01 140 1023		
HARAX® Pg 13.5 / 3 + PE with solder termination	21 01 140 3023		
HARAX® Pg 13.5 / 4 contacts with pre-assembled strand, l = 500 mm, 1.5 mm ²	21 01 140 1323		
HARAX® Pg 13.5 / 3 + PE with pre-assembled strand, l = 500 mm, 1.5 mm ²	21 01 140 3333		
HARAX® M20 / 4 contacts with solder termination	21 01 141 1023		
HARAX® M20 / 3 + PE with solder termination	21 01 141 3023		
HARAX® M20 / 4 contacts with pre-assembled strand, l = 500 mm, 1.5 mm ²	21 01 141 1323		
HARAX® M20 / 3 + PE with pre-assembled strand, l = 500 mm, 1.5 mm ²	21 01 141 3333		

Other length on request

Stock items in bold type

List of part numbers



Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
09 47 220 0002	42	21 01 010 0001	55	21 02 454 7302	20	21 03 321 1410	50
09 47 220 0003	42	21 01 010 0006	55	21 02 454 7303	20	21 03 321 1420	50
09 47 220 0005	42	21 01 010 2001	29	21 02 454 7304	20	21 03 321 1425	30
09 47 220 0006	42	21 01 010 2007	29	21 02 454 7305	20	21 03 321 1510	50
09 47 220 0011	42	21 01 010 2008	22	21 02 554 4301	21	21 03 321 1520	50
09 47 220 0013	42	21 01 010 2011	29	21 02 554 4302	21	21 03 321 2425	30
09 47 220 0022	42	21 01 010 2013	22	21 02 554 4303	21	21 03 321 6410	50
		21 01 010 2015	29	21 02 554 4304	21	21 03 321 6420	50
09 47 222 2002	42	21 01 010 2016	22	21 02 554 4305	21	21 03 321 6510	50
09 47 222 2003	42	21 01 010 2017	29	21 02 554 7301	21	21 03 321 6520	50
09 47 222 2005	42	21 01 010 2019	29	21 02 554 7302	21	21 03 330 1300	36
09 47 222 2006	42			21 02 554 7303	21		
09 47 222 2011	42	21 01 100 9014	44	21 02 554 7304	21	21 03 339 1301	36
09 47 222 2013	42			21 02 554 7305	21	21 03 339 2301	36
09 47 222 2022	42	21 01 130 1013	57				
		21 01 130 1023	57			21 03 341 1425	32
09 47 800 0002	42	21 01 130 1223	57	21 03 030 1300	36	21 03 341 1505	51
09 47 800 0003	42	21 01 130 3013	57			21 03 341 2425	32
09 47 800 0005	42	21 01 130 3023	57	21 03 111 1405	23	21 03 341 2505	51
09 47 800 0006	42	21 01 130 3233	57	21 03 111 2405	23		
09 47 800 0011	42	21 01 130 4011	55			21 03 371 1400	52
09 47 800 0013	42	21 01 130 4241	55	21 03 212 1305	27	21 03 371 1403	43
09 47 800 0022	42			21 03 212 1306	27	21 03 371 1420	43
		21 01 140 1023	57	21 03 212 1400	27	21 03 371 2403	43
09 47 808 0002	42	21 01 140 1323	57	21 03 212 1407	27	21 03 371 2415	52
09 47 808 0003	42	21 01 140 3023	57	21 03 212 2305	27		
09 47 808 0005	42	21 01 140 3333	57	21 03 212 2306	27	21 03 381 1425	38
09 47 808 0006	42	21 01 140 4341	55	21 03 212 2400	27	21 03 381 2400	43
09 47 808 0011	42	21 01 140 5081	23	21 03 212 2407	27	21 03 381 2425	38
09 47 808 0013	42	21 01 140 5091	23			21 03 381 2801	9
09 47 808 0022	42			21 03 216 1505	27	21 03 381 2802	9
		21 01 141 1023	57	21 03 216 2505	27	21 03 381 2803	9
		21 01 141 1323	57			21 03 381 2804	10
09 67 000 5476	44	21 01 141 3023	57	21 03 221 1405	30	21 03 381 2805	10
09 67 000 5576	44	21 01 141 3333	57	21 03 221 2405	30	21 03 381 4400	43
09 67 000 8476	44					21 03 381 4410	53
09 67 000 8576	44			21 03 241 1300	32	21 03 381 4412	53
				21 03 241 1301	32	21 03 381 4430	53
				21 03 241 2300	32	21 03 381 4432	53
				21 03 241 2301	32	21 03 381 4802	9
09 99 000 0380	22	21 02 151 1305	18			21 03 381 4804	10
09 99 000 0382	29	21 02 151 1405	18	21 03 272 1505	27	21 03 381 6405	43
09 99 000 0384	29	21 02 151 2305	18	21 03 272 2505	27	21 03 381 6410	52
09 99 000 0395	48	21 02 151 2405	18			21 03 381 6420	52
09 99 000 0501	44			21 03 281 1405	38		
09 99 000 0525	44	21 02 159 1305	18	21 03 281 2405	38		
09 99 000 0531	44					21 03 415 2401	25
		21 02 454 5301	20	21 03 282 1405	38	21 03 415 2402	25
		21 02 454 5302	20	21 03 282 2405	38	21 03 415 2403	25
		21 02 454 5303	20			21 03 415 2404	25
21 01 000 0003	29	21 02 454 5304	20	21 03 311 1402	28	21 03 415 2405	25
21 01 000 0018	44	21 02 454 5305	20	21 03 311 1501	28	21 03 415 5401	25
21 01 000 0020	48	21 02 454 7301	20	21 03 311 2400	28	21 03 415 5402	25
				21 03 311 2501	28		

List of part numbers



Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
21 03 415 5403	25	21 03 515 7402	26	21 03 841 1505	33	21 83 515 4401	26
21 03 415 5404	25	21 03 515 7403	26	21 03 841 1525	33	21 83 515 4402	26
21 03 415 5405	25	21 03 515 7404	26	21 03 841 2505	33	21 83 515 4403	26
21 03 415 7401	25	21 03 515 7405	26	21 03 841 2525	33	21 83 515 4404	26
21 03 415 7402	25					21 83 515 4405	26
21 03 415 7403	25	21 03 549 1301	34	21 03 881 5805	9	21 83 515 7401	26
21 03 415 7404	25	21 03 549 1302	34	21 03 882 1405	39	21 83 515 7402	26
21 03 415 7405	25	21 03 549 1303	34	21 03 882 1425	39	21 83 515 7403	26
		21 03 549 1304	34	21 03 882 2405	39	21 83 515 7404	26
21 03 449 4301	35	21 03 549 1305	34	21 03 882 2425	39	21 83 515 7405	26
21 03 449 4302	35	21 03 549 2301	35				
21 03 449 4303	35	21 03 549 2302	35				
21 03 449 4304	35	21 03 549 2303	35	21 04 116 1505	45		
21 03 449 4305	35	21 03 549 2304	35	21 04 116 2505	45		
21 03 449 6301	35	21 03 549 2305	35				
21 03 449 6302	35	21 03 549 3301	34	21 04 316 1505	48		
21 03 449 6303	35	21 03 549 3302	34	21 04 316 2505	48		
21 03 449 6304	35	21 03 549 3303	34				
21 03 449 6305	35	21 03 549 3304	34	21 04 416 1501	47		
		21 03 549 3305	34	21 04 416 1502	47		
21 03 483 1801	11	21 03 549 4301	35	21 04 416 1503	47		
21 03 483 1803	11	21 03 549 4302	35	21 04 416 1504	47		
21 03 483 1805	11	21 03 549 4303	35	21 04 416 1505	47		
21 03 483 1807	11	21 03 549 4304	35	21 04 416 3501	47		
21 03 483 1810	11	21 03 549 4305	35	21 04 416 3502	47		
21 03 483 5801	11			21 04 416 3503	47		
21 03 483 5802	11			21 04 416 3504	47		
21 03 483 5850	11	21 03 585 1401	41	21 04 416 3505	47		
21 03 483 5851	11	21 03 585 1403	41				
21 03 483 5852	11	21 03 585 1405	41	21 04 516 2501	47		
		21 03 585 1410	41	21 04 516 2502	47		
21 03 485 1401	41	21 03 585 1420	41	21 04 516 2503	47		
21 03 485 1403	41	21 03 585 1451	41	21 04 516 2504	47		
21 03 485 1405	41	21 03 585 1457	41	21 04 516 2505	47		
21 03 485 1410	41	21 03 585 3401	41	21 04 516 4501	47		
21 03 485 1420	41	21 03 585 3403	41	21 04 516 4502	47		
21 03 485 1451	41	21 03 585 3405	41	21 04 516 4503	47		
21 03 485 1457	41	21 03 585 3410	41	21 04 516 4504	47		
21 03 485 3401	41	21 03 585 3420	41	21 04 516 4505	47		
21 03 485 3403	41	21 03 585 3451	41				
21 03 485 3405	41	21 03 585 3457	41				
21 03 485 3410	41						
21 03 485 3420	41			21 82 554 4301	21		
21 03 485 3451	41	21 03 812 1405	31	21 82 554 4302	21		
21 03 485 3457	41	21 03 812 1505	31	21 82 554 4303	21		
		21 03 812 2405	31	21 82 554 4304	21		
21 03 515 4401	26	21 03 812 2505	31	21 82 554 4305	21		
21 03 515 4402	26			21 82 554 7301	21		
21 03 515 4403	26	21 03 822 1425	31	21 82 554 7302	21		
21 03 515 4404	26	21 03 822 1525	31	21 82 554 7303	21		
21 03 515 4405	26	21 03 822 2425	31	21 82 554 7304	21		
21 03 515 7401	26	21 03 822 2525	31	21 82 554 7305	21		